

Top 100  
Global  
Innovator  
for 10 years

Solution Power

# UL/ANSI Medium Voltage Metal Clad Switchgear



**LS** ELECTRIC



**UL/ANSI**

# Medium Voltage Metal Clad Switchgear

## Contents

• Key features .....	04
• UL/ANSI MCSG .....	09
• Susol VCB & VCB compartment .....	26
• Devices .....	41
• Project references .....	66
• Partnership .....	67





Solution Power S5/15 UL AR  
(1-High)



Solution Power S5/15 UL AR  
(2-High)

## Solution Power S5/15 UL AR

- Rated voltage : 4.76/15kV
- Rated current : 1200/2000A
- Rated interrupting current : 25/31.5kA
- Accessibility type : Type 2 & 2B
- Arc resistance performance : 31.5kA/0.5sec
- Certification & Standards
  - UL Listed
  - IEEE C37.09, IEEE C37.20.2, IEEE C37.20.7



Solution Power S5/15 UL NAR  
(1-High)



Solution Power S5/15 UL NAR  
(2-High)

## Solution Power S5/15 UL NAR

- Rated voltage : 4.76/15kV
- Rated current : 1200/2000A
- Rated interrupting current : 25/31.5kA
- Certification & Standards
  - UL Listed
  - IEEE C37.09, IEEE C37.20.2



Solution Power S38 ANSI AR

## Solution Power S38 ANSI AR

- Rated voltage : 38kV
- Rated current : 1200/2000A
- Rated interrupting current : 31.5/40kA
- Accessibility type : Type 2 & 2A
- Arc resistance performance : 40kA/0.5sec
- Standards
  - ANSI C37.55, IEEE C37.20.2, IEEE C37.20.6, IEEE C37.20.7



# Key features



## Efficiency & Cost-savings

### Compact size

With our compact MCSG, LS enables you to reduce and make efficient use of the floor space. We secure a free space for installation even in the places where safety is top priority such as Power Plant(Nuclear, Thermal, Hydro and Cogeneration), Industrial Plant(semiconductor, petrochemical, steel) and Infrastructure facilities (subways, railways, airports), etc.

- **Reduced installing area up to 43% for 1-High MCSG**


Conventional switchgear: W36" D82" → LS: W23.6" D72" (Solution Power S5/15 UL AR) Note1, 2)

Conventional switchgear: W36" D82" → LS: W29.5" D67" (Solution Power S5/15 UL NAR)

- **Reduced installing area up to 38% for 2-High MCSG**

Conventional switchgear: W36" D105" → LS: W23.6" D99" (Solution Power S5/15 UL AR) Note1, 2)

Conventional switchgear: W36" D105" → LS: W29.5" D90" (Solution Power S5/15 UL NAR)

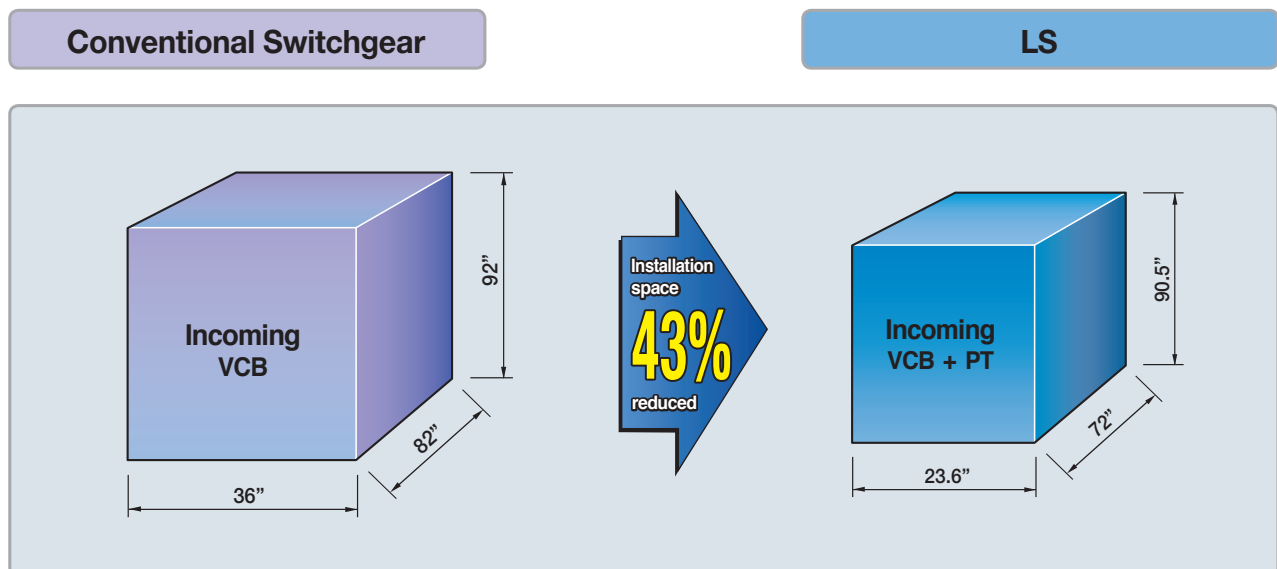

Note) 1. For models 5/15kV 31.5kA 1200A 1-high MCSG panel.  
2. In case of bottom incoming and outgoing.



# Key features




## Safety

### Arc resistance design (for AR type MCSG)

LS MCSG is designed to redirect arc energy and prevent damage to peripheral devices as possible in the event of internal arc happening. Its plenum design redirects dangerous arc flash energy away from operating personnel.

- Using the arc-lead plenums & side cover for arc ventilation
- Optimized flap position for arc release
- The top guidance & exhaust for arc pressure & heat

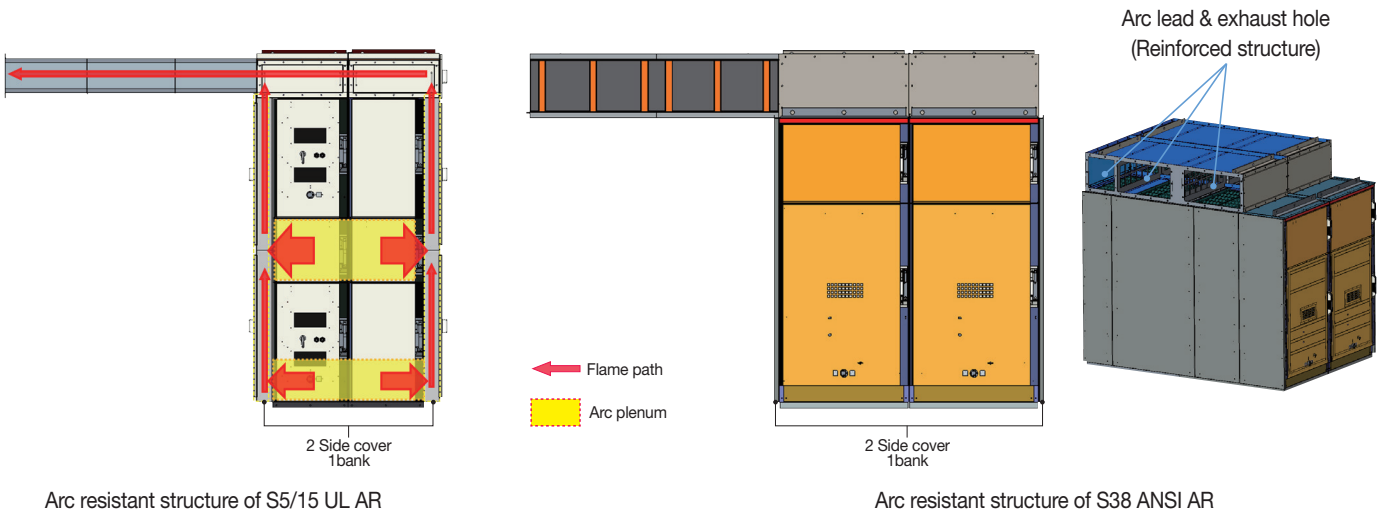

### International certification and various devices

LS provides the best protection rating out of air insulated switchgear. To prove its reliability and safety, LS uses the internationally recognized testing agency, KERI / KEMA / CESI for certification as well as LS' test lab PT&T that is a KOLAS-qualified (Korea Laboratory Accreditation Scheme) accredited testing laboratory and provides worldwide testing service.

- Metal clad type: each compartment is divided by metal partitions for the highest degree of protection rating out of air insulated switchgears.
- Short-circuit, short-time current and internal arc tests passed at IEEE C37.20.7
- Various options including
  - Mechanical interlock to prevent from inadvertent operating
  - Mechanism enable the breaker to be drawn in or out without opening the door of switchgear
- Solid structure with hinge and locker
- IP Cover on the face of the breaker and inspection window on the door
- Metal shutter and shutter padlock installed in CB compartment for safe maintenance
- Used reliable tube & boots for busbar insulation
- Insulation cap and padlock used for earthing switch to secure insulation and safety



# Key features





## Convenience

### Modular structure

LS MCSG is a modular type and easy stackable for quick assembly.

- Module assembly structure
- Interchangeable VCB & PT compartment

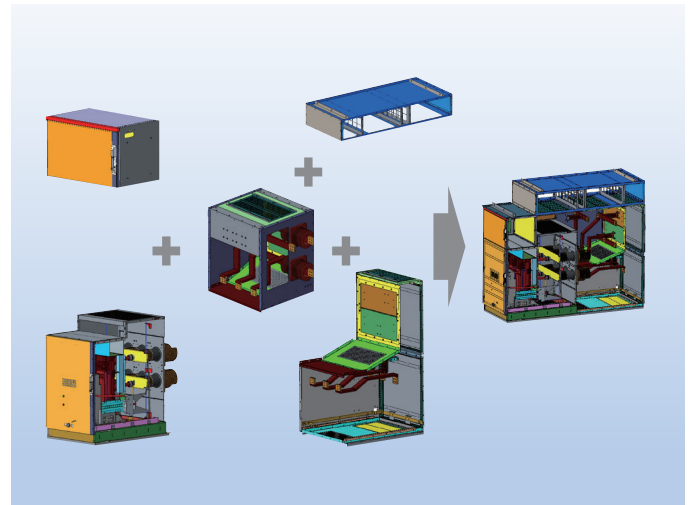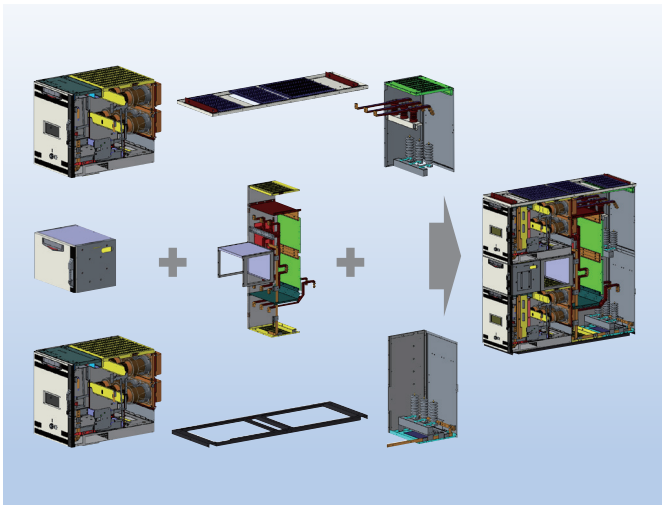

### Time saving design for maintenance and inspection

- **Front accessible CT structure**

Completely front accessibility for cable connections and current transformers (CT); this design feature ensures ease of maintenance, minimal usage of floor space and creates a safe environment.

- **Front & rear viewing windows**

Viewing windows are installed on the front and rear door in order to inspect inside of switchgear without door open.

- **Infrared (IR) viewing ports (Optional)**

Rear infrared viewing ports allow maintenance personnel to easily access thermal monitoring of the equipment without having to open the enclosure. IR technology ensures the operators safety while assessing the equipment's internal components for possible overheating.


# Key features




## Extensible design

LS compact MCSG can satisfy any configuration the customer wants.

### S5/15 UL AR 1-High MCSG

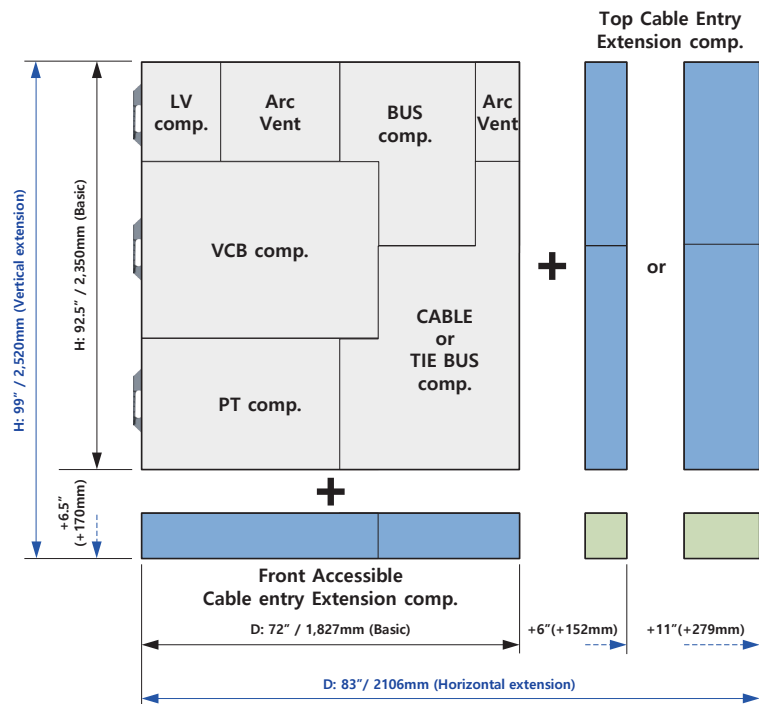

### S5/15 UL AR 2-High MCSG

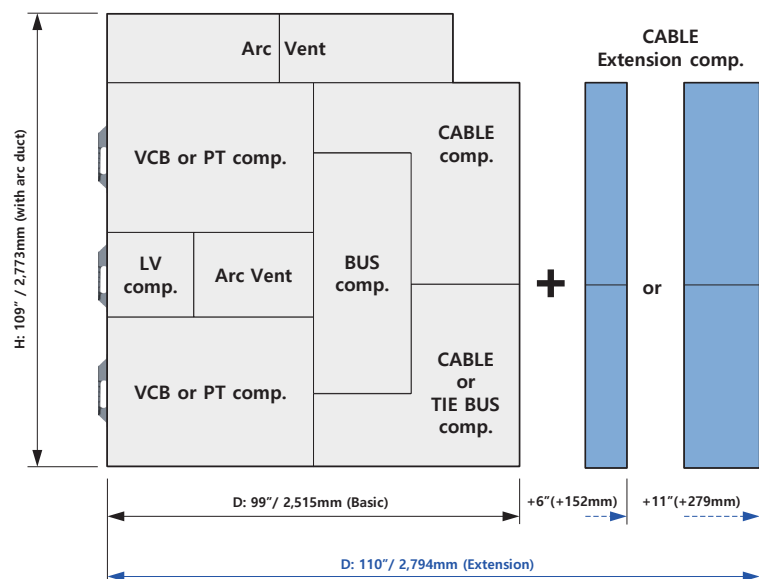





# Key features





Flexibility

## S5/15 UL NAR 1-High MCSG

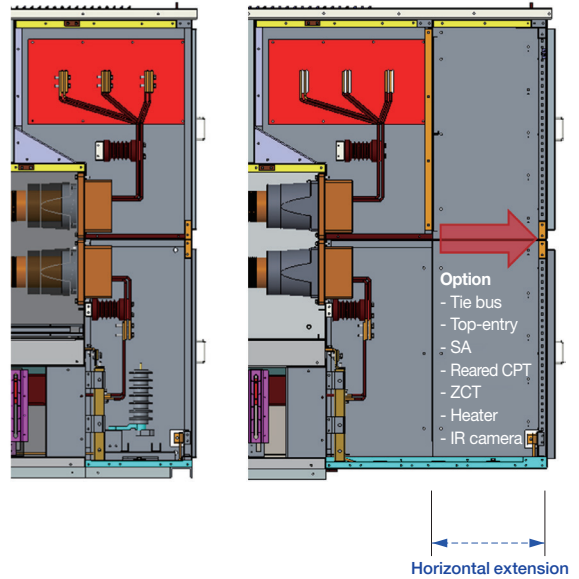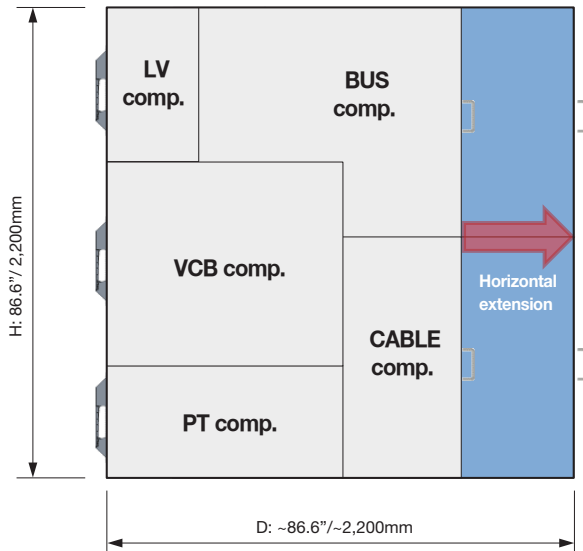

## S5/15 UL NAR 2-High MCSG

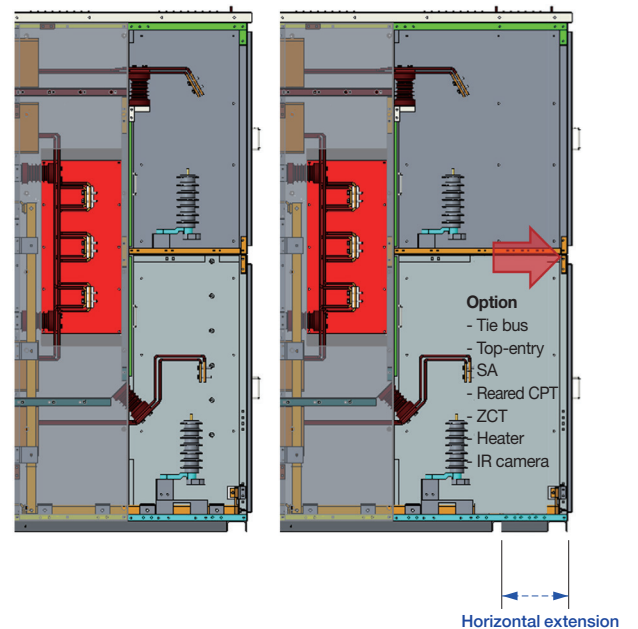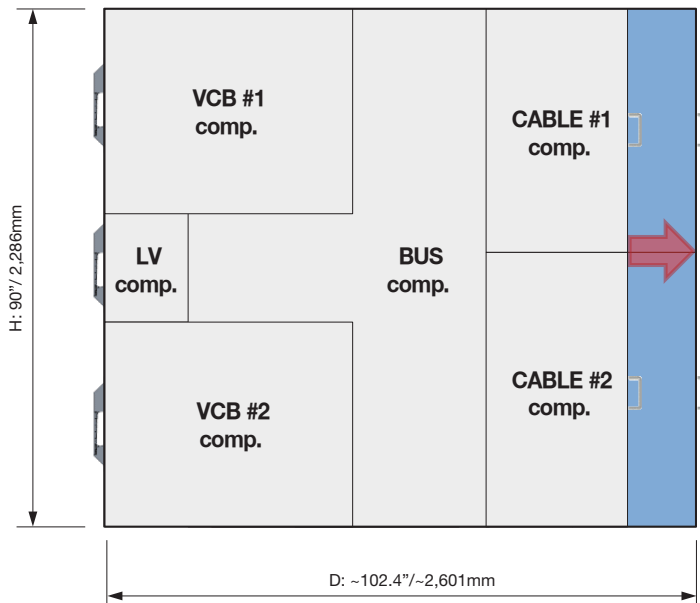

### Building



- Commercial buildings
- Critical power (Data center)

### Industry



- Oil & Gas industry
- Petroleum industry
- Chemical industry
- Iron & Steel industry
- Automobile industry
- Cement industry
- Mining industry
- Manufacturing industry

### Utility/Public



- Power plants
- Transforming/switching substations



# UL/ANSI MCSG

## Solution Power S5/15 UL AR



### 1-High MCSG

#### Compact

- Installation area reduced by 43% in the electrical room
- LS 1-High MCSG with arc resistance system: W23.6" D72" (Other's conventional type: W36" D82")

#### Front accessible CT structure

- CT + CT bushing (Integrated assembly structure)

#### Structure of arc resistance

- Total 4ea arc flip

#### Modular design for easy assembly

### Ratings


Type	UM1-05A□A12	UM1-15A□A12	UM1-05A□B12	UM1-15A□B12	UM1-05A□B20	UM1-15A□B20
Rated voltage, Ur (kV)	4.76	15	4.76	15	4.76	15
Rated current, Ir (A)	1200	1200	1200	1200	2000	2000
Phase distance, inch (mm)	5.9 (150)	5.9 (150)	8.3 (210)	8.3 (210)	8.3 (210)	8.3 (210)
Rated frequency, fr (Hz)	60					
Rated interrupting current, Ik (kA)	25, 31.5					
Rated short time current, Ik/tk (kA) / sec	25, 31.5 / 2					
Momentary current, Ip (kA)	65, 82					
Rated interrupting time, Cycle	3					
AC withstand voltage, Ud (kV) / 1min	36 / 1min					
Impulse withstand voltage, Up (kV, 1.2x50us)	60, 95					
Arc resistance performance, kA / sec	31.5 / 0.5					
Size (W×H×D), inch (mm)	23.6×92.5×72~84* (600×2,350×1,827~2,131.4*) * Back side extended type (length 20")			29.5×92.5×72~84* (750×2,350×1,827~2,131.4*) * Back side extended type (length 20")		
Applicable standard	IEEE Std C37.09, IEEE Std C37.20.2, ANSI C37.54, ANSI C37.55					

### Structures

Front view




Side view

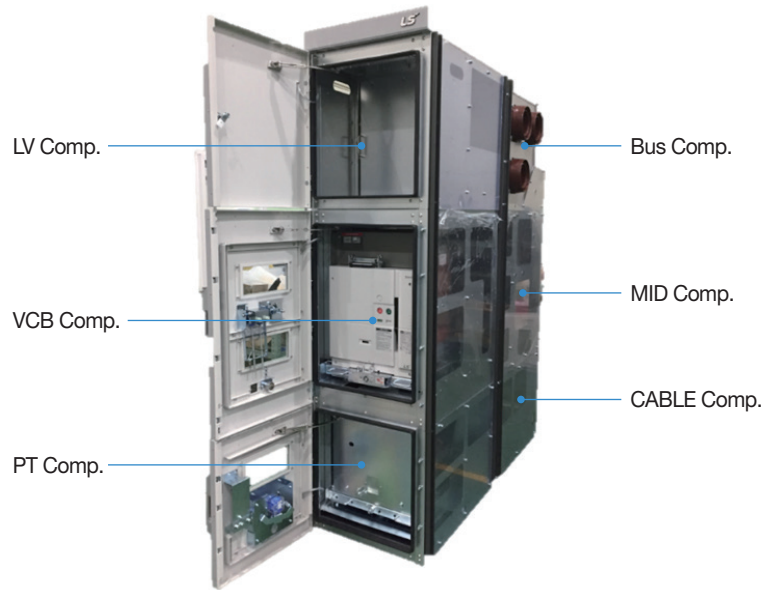

[ Unit: inch(mm) ]

### Configuration

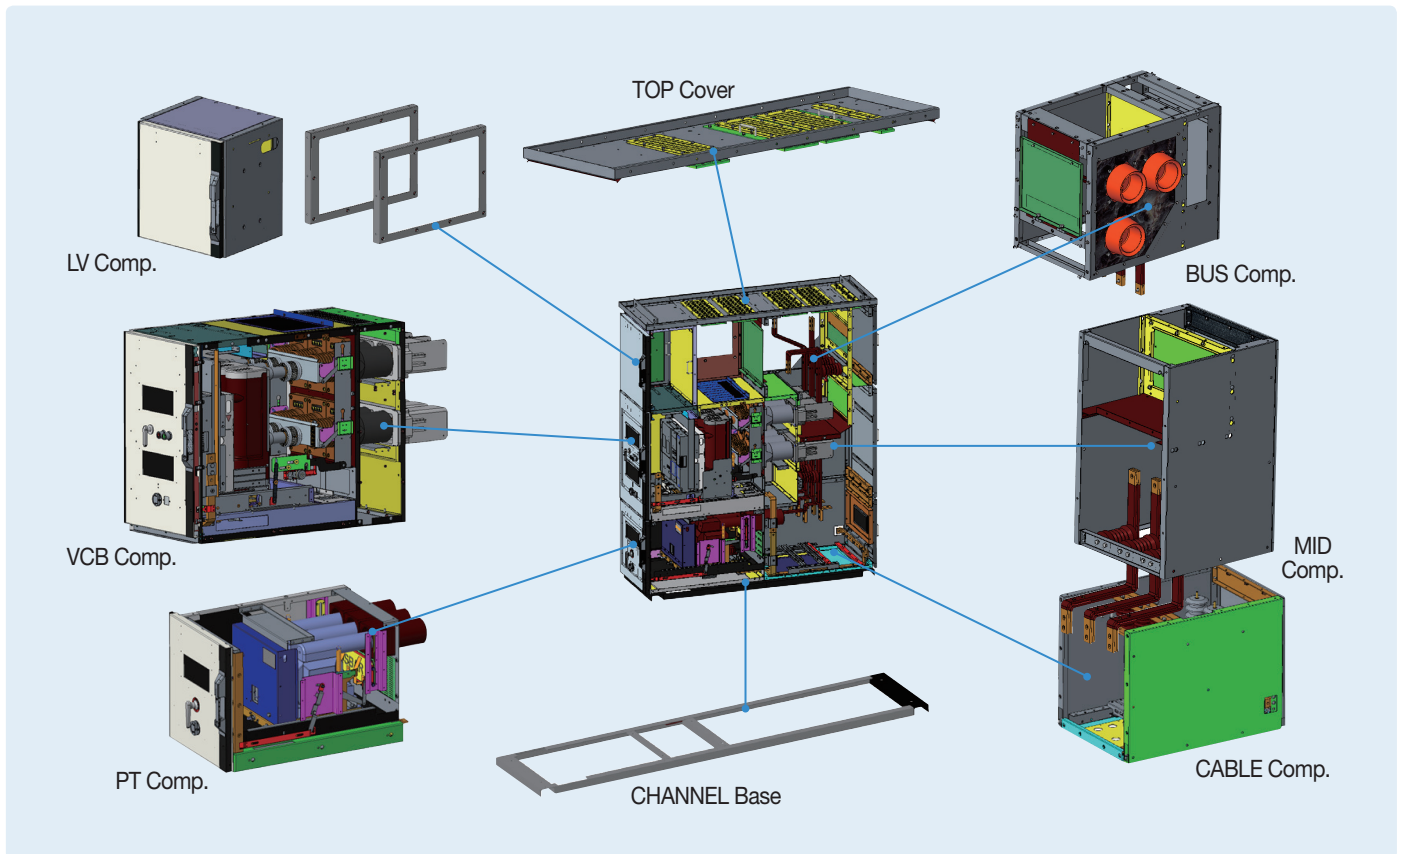



# UL/ANSI MCSG

## Solution Power S5/15 UL AR



### 2-High MCSG

#### Compact

- Installation area reduced by 38% in the electrical room
- LS 2-High MCSG with arc resistance system: W23.6" D99"  
(Other's conventional type: W36" D105")

#### Front accessible CT structure

- Minimizes the time required for inspection, repair and maintenance of CT/CT Bushing

#### Structure of arc resistance

- Total 7ea arc flip
- Side cover, 5.9"wide

#### Modular design for easy assembly

### Ratings

Type	UM2-05A□A12	UM2-15A□A12	UM2-05A□B12	UM2-15A□B12	UM2-05A□B20	UM2-15A□B20
Rated voltage, Ur (kV)	4.76	15	4.76	15	4.76	15
Rated current, Ir (A)	1200	1200	1200	1200	2000	2000
Phase distance, inch (mm)	5.9 (150)	5.9 (150)	8.3 (210)	8.3 (210)	8.3 (210)	8.3 (210)
Rated frequency, fr (Hz)	60					
Rated interrupting current, Ik (kA)	25, 31.5					
Rated short time current, Ik/tk (kA) / sec	25, 31.5 / 2					
Momentary current, Ip (kA)	65, 82					
Rated interrupting time, Cycle	3					
AC withstand voltage, Ud (kV) / 1min	36 / 1min					
Impulse withstand voltage, Up (kV, 1.2x50us)	60, 95					
Arc resistance performance, kA / sec	31.5 / 0.5					
Size (W×H×D), inch (mm)	23.6×109*×99~111** (600×2,773*×2,515~2,819.4**) * With arc duct (height 14.1") ** Back side extended type (length 20")			29.5×109*×99~111** (750×2,773*×2,515~2,819.4**) * With arc duct (height 14.1") ** Back side extended type (length 20")		
Applicable standard	IEEE Std C37.09, IEEE Std C37.20.2, ANSI C37.54, ANSI C37.55					

### Structures

Front view




Side view



[ Unit: inch(mm) ]

\* The side cover of this switchgear is not real but only for exhibition demo gear.

### Configuration

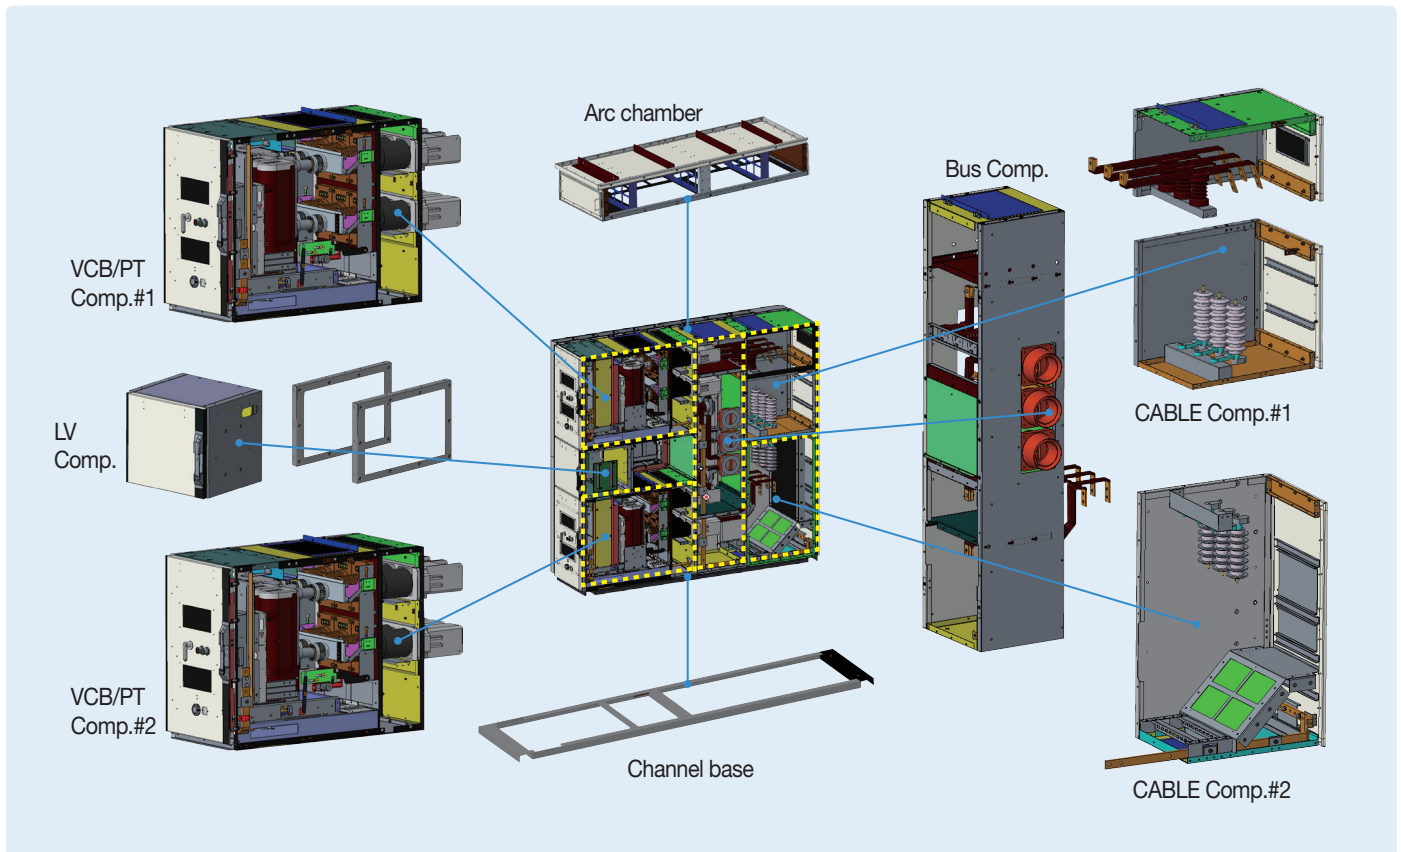



# UL/ANSI MCSG

## Solution Power S5/15 UL NAR



### 1-High MCSG

#### Compact

- Installation area reduced by 35% in the electrical room
- LS 1-High MCSG without arc resistance system: W29.5" D67"  
(Other's conventional type: W36" D82")

#### Front accessible CT structure

- Easy assembly and wiring
- Minimized time for inspection, repair and maintenance

#### Modular structure

- Easy and fast assembly

## Ratings


Type	UM1-05N□B12	UM1-05N□B20	UM1-15N□B12	UM1-15N□B20
Rated voltage, Ur (kV)	4.76	4.76	15	15
Rated current, Ir (A)	1200	2000	1200	2000
Phase distance, inch (mm)	8.3 (210)	8.3 (210)	8.3 (210)	8.3 (210)
Rated frequency, fr (Hz)	60			
Rated interrupting current, Ik (kA)	25, 31.5			
Rated short time current, Ik/tk (kA) / sec	25, 31.5 / 2			
Momentary current, Ip (kA)	65, 82			
Rated interrupting time, Cycle	3			
AC withstand voltage, Ud (kV) / 1min	36 / 1min			
Impulse withstand voltage, Up (kV, 1.2x50us)	60, 95			
Size (W×H×D), inch (mm)	29.5×86.6×79~86.6 (750×2,200×2,007~2,200)			
Applicable standard	IEEE Std C37.09, IEEE Std C37.20.2, ANSI C37.54, ANSI C37.55			

### Structures

Front view



Side view

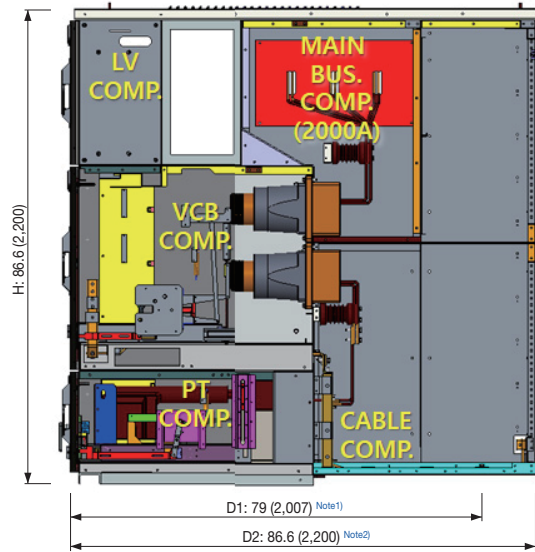

[ Unit: inch(mm) ]


Note) Depth is changed according to customer requirement for options.

\* Option : Tie bus, Top cable entry, SA, Reared CPT, ZCT, Heater, IR camera, etc.

1. Minimum depth is 79 inches for a panel with SA. (e.g. VCB+SA+Bottom cable entry or VCB+PT+SA+Bottom cable entry)  
If SA is not applied, depth can be 67 inches.

2. Minimum depth is 86.6 inches for a panel with Top cable entry. (e.g. VCB+PT+Top cable entry or VCB+SA+Top cable entry)

### Configuration

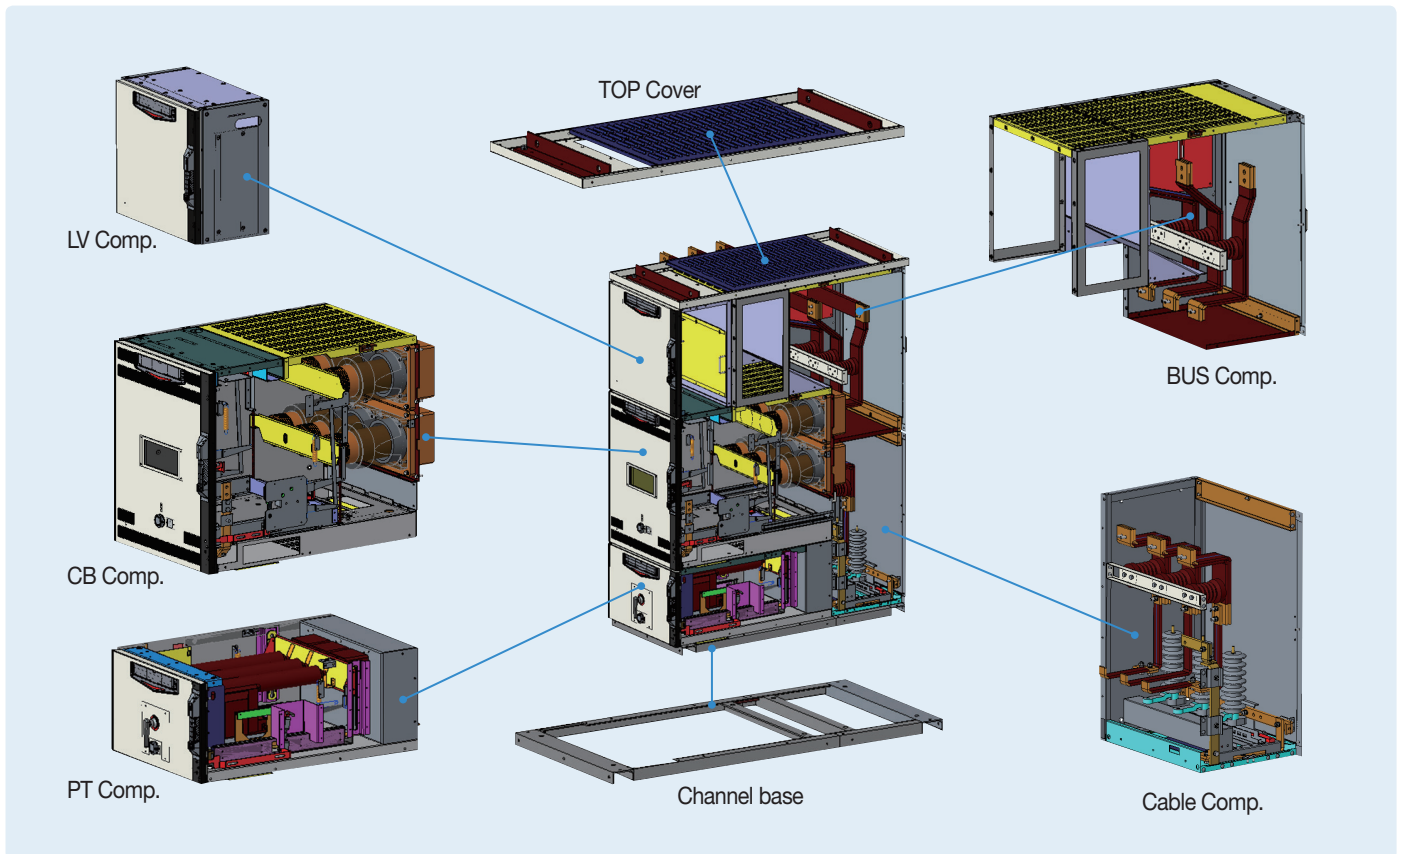

# UL/ANSI MCSG

## Solution Power S5/15 UL NAR



### 2-High MCSG

#### Compact

- Installation area reduced by 30% in the electrical room
- LS 2-High MCSG without arc resistance system: W29.5" D90"  
(Other's conventional type: W36" D105")

#### Front accessible CT structure

- Easy assembly and wiring
- Minimized time for inspection, repair and maintenance

#### Modular structure

- Easy and fast assembly

### Ratings

Type	UM2-05N□B12	UM2-05N□B20	UM2-15N□B12	UM2-15N□B20
Rated voltage, Ur (kV)	4.76	4.76	15	15
Rated current, Ir (A)	1200	2000	1200	2000
Phase distance, inch (mm)	8.3 (210)	8.3 (210)	8.3 (210)	8.3 (210)
Rated frequency, fr (Hz)	60			
Rated interrupting current, Ik (kA)	25, 31.5			
Rated short time current, Ik/tk (kA) / sec	25, 31.5 / 2			
Momentary current, Ip (kA)	65, 82			
Rated interrupting time, Cycle	3			
AC withstand voltage, Ud (kV) / 1min	36 / 1min			
Impulse withstand voltage, Up (kV, 1.2x50us)	60, 95			
Size (W×H×D), inch (mm)	29.5×90×102.4 (750×2,286×2,601)			
Applicable standard	IEEE Std C37.09, IEEE Std C37.20.2, ANSI C37.54, ANSI C37.55			




### Structures

Front view




Side view

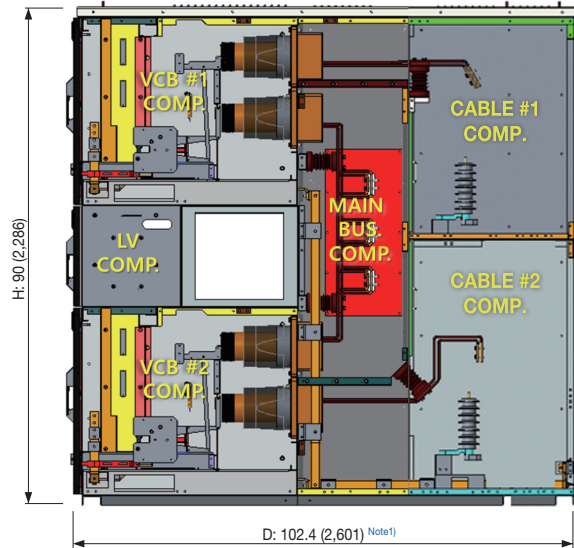

[ Unit: inch(mm) ]

Note) 1. Minimum depth is 102.4 inches for a panel with option. (e.g. VCB+SA+Bottom cable entry or VCB+PT+Top cable entry)  
If the option is not applied, depth can be 90 inches.  
\* Option : Tie bus, Top cable entry, SA, Rearred CPT, ZCT, Heater, IR camera, etc.

### Configuration

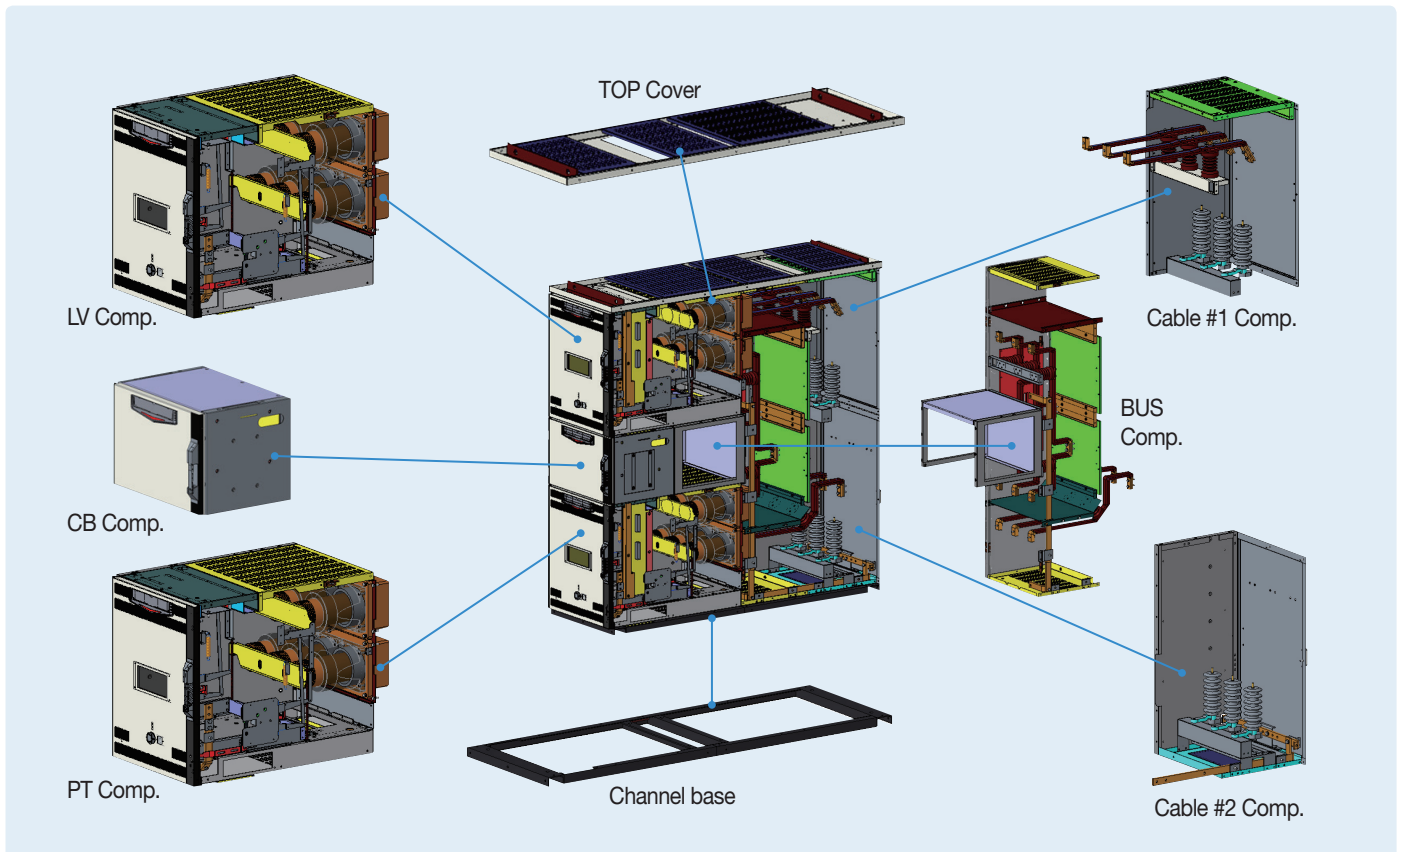

# UL/ANSI MCSG

## Solution Power S38 ANSI AR



### Compact

- 2-stack VTs in one section

### Front accessible CT structure

- Easy assembly and wiring
- Minimized time for inspection, repair and maintenance

### Optimized arc resistance structure

- Total 5ea arc relief flip
- Arc resistance side cover
- Pressure & heat exhaust structure

### Modular structure

- Easy and fast assembly

## Ratings

Type	UM1-38A32D12	UM1-38A32D20	UM1-38A40D12	UM1-38A40D20
Rated voltage, Ur (kV)	38	38	38	38
Rated current, Ir (A)	1200	2000	1200	2000
Phase distance, inch (mm)	11.8 (300)			
Rated frequency, fr (Hz)	60			
Rated interrupting current, Ik (kA)	31.5		40	
Rated short time current, Ik/tk (kA) / sec	31.5 / 2		40 / 2	
Momentary current, Ip (kA)	82		104	
Rated interrupting time, Cycle	3		3	
AC withstand voltage, Ud (kV) / 1min	80		80	
Impulse withstand voltage, Up (kV, 1.2x50us)	150		150	
Arc resistance performance, kA / sec	31.5 / 0.5		40 / 0.5	
Size (W×H×D), inch (mm)	42×86.6~108.3×118; Arc duct Height : 19.7 (1,066×2,250~2,750×3000; Arc duct Height : 500)			
Applicable standard	ANSI C37.55, IEEE C37.20.2, IEEE C37.20.6, IEEE C37.20.7 (designed and tested to comply with ANSI and IEEE standards)			

### Structures


Front view

[Unit: inch(mm)]




Side view

[ Unit: inch(mm) ]

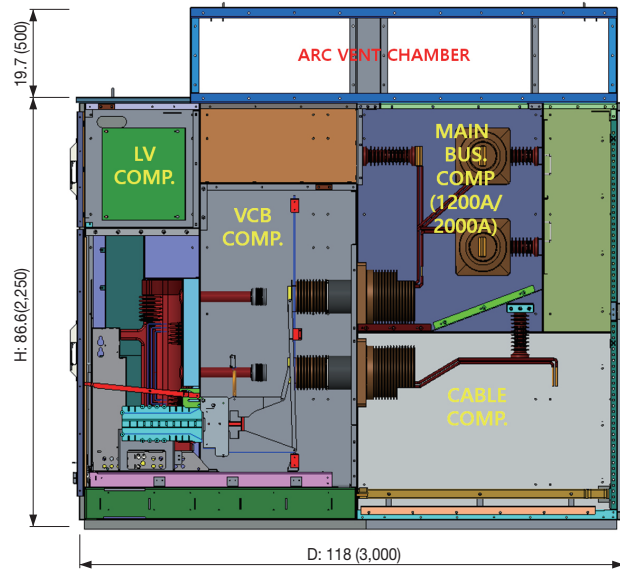

### Configuration

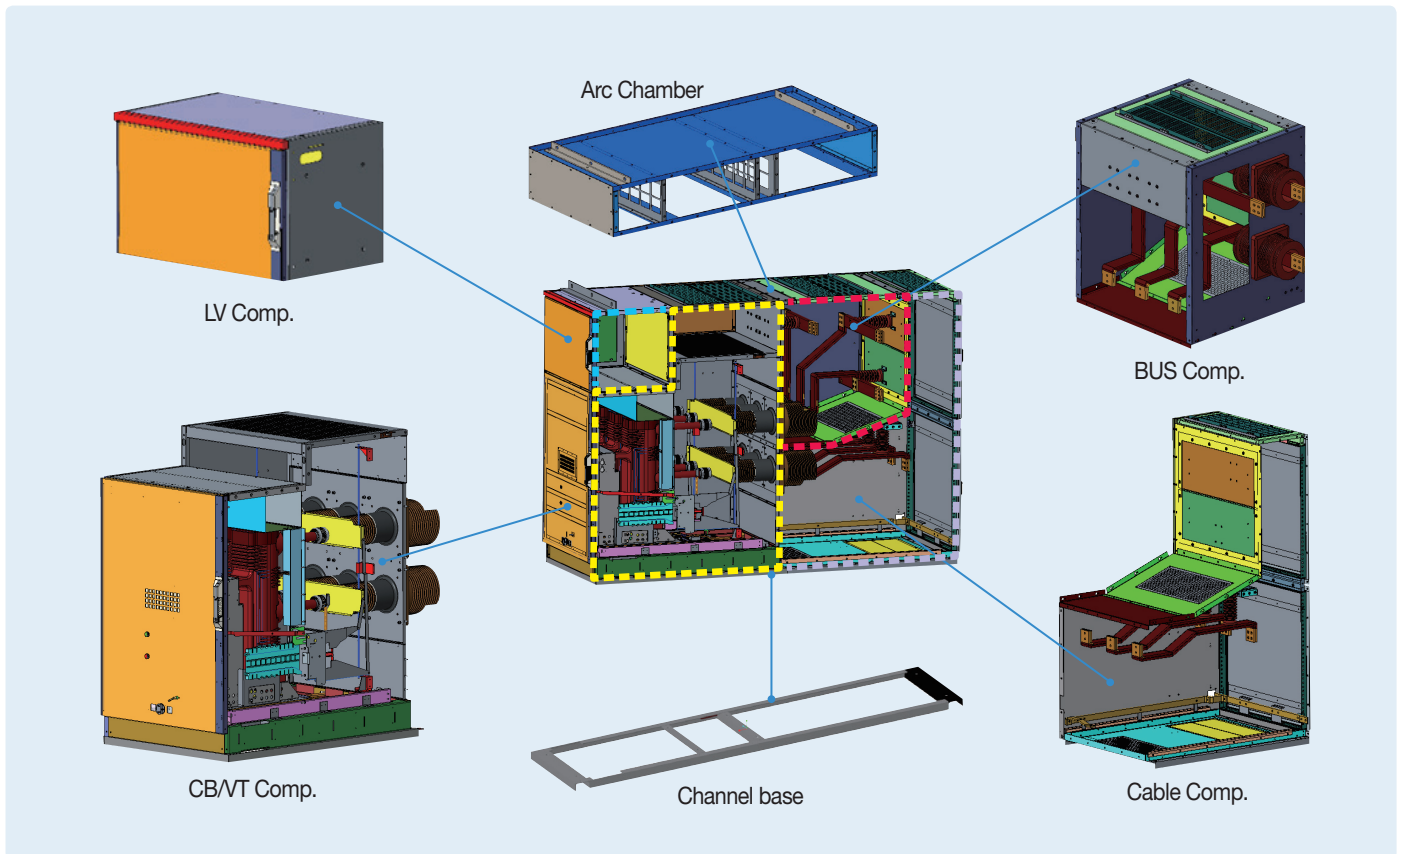



# UL/ANSI MCSG

## Solution Power S38 ANSI NAR



### Compact

- 2-stack VTs in one section

### Front accessible CT structure

- Easy assembly and wiring
- Minimized time for inspection, repair and maintenance

### Modular structure

- Easy and fast assembly

## Ratings


Type	UM1-38N32D12	UM1-38N32D20	UM1-38N40D12	UM1-38N40D20
Rated voltage, Ur (kV)	38	38	38	38
Rated current, Ir (A)	1200	2000	1200	2000
Phase distance, inch (mm)	11.8 (300)			
Rated frequency, fr (Hz)	60			
Rated interrupting current, Ik (kA)	31.5		40	
Rated short time current, Ik/tk (kA) / sec	31.5 / 2		40 / 2	
Momentary current, Ip (kA)	82		104	
Rated interrupting time, Cycle	3		3	
AC withstand voltage, Ud (kV) / 1min	80		80	
Impulse withstand voltage, Up (kV, 1.2x50us)	150		150	
Size (W×H×D), inch (mm)	42×86.6×118 (1,066×2,250×3,000)			
Applicable standard	ANSI C37.55, IEEE C37.20.2, IEEE C37.20.6 (designed and tested to comply with ANSI and IEEE standards)			

### Structures

Front view




Side view

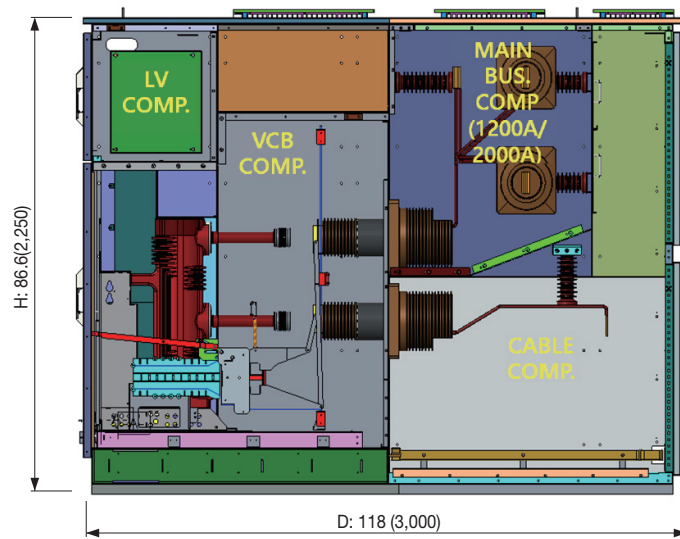

[ Unit: inch(mm) ]

### Configuration

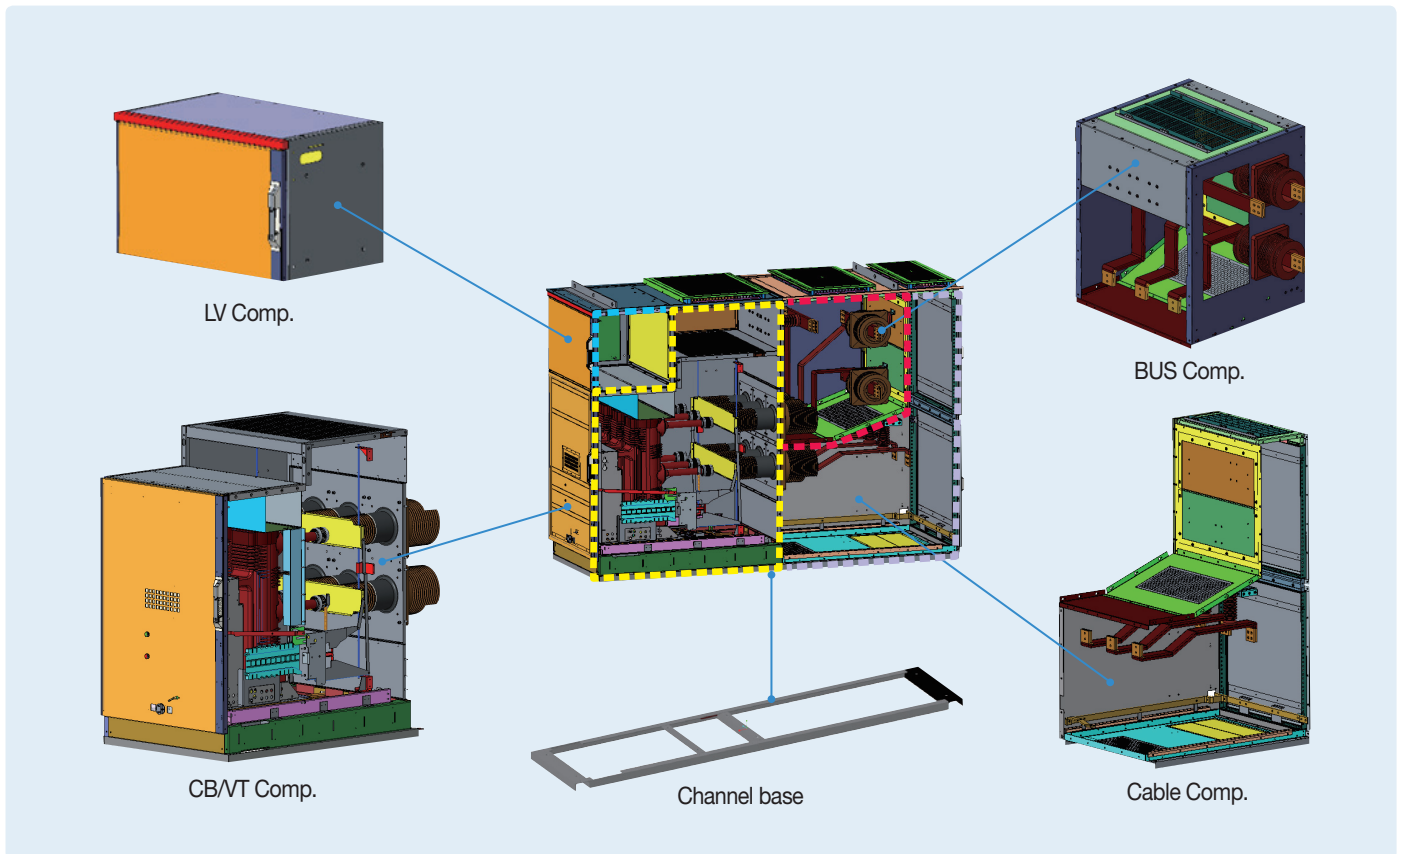

# UL/ANSI MCSG


## Solution Power S38 ANSI AR & NAR

### Outdoor Enclosures



### Dimension

[ Unit: inch(mm) ]

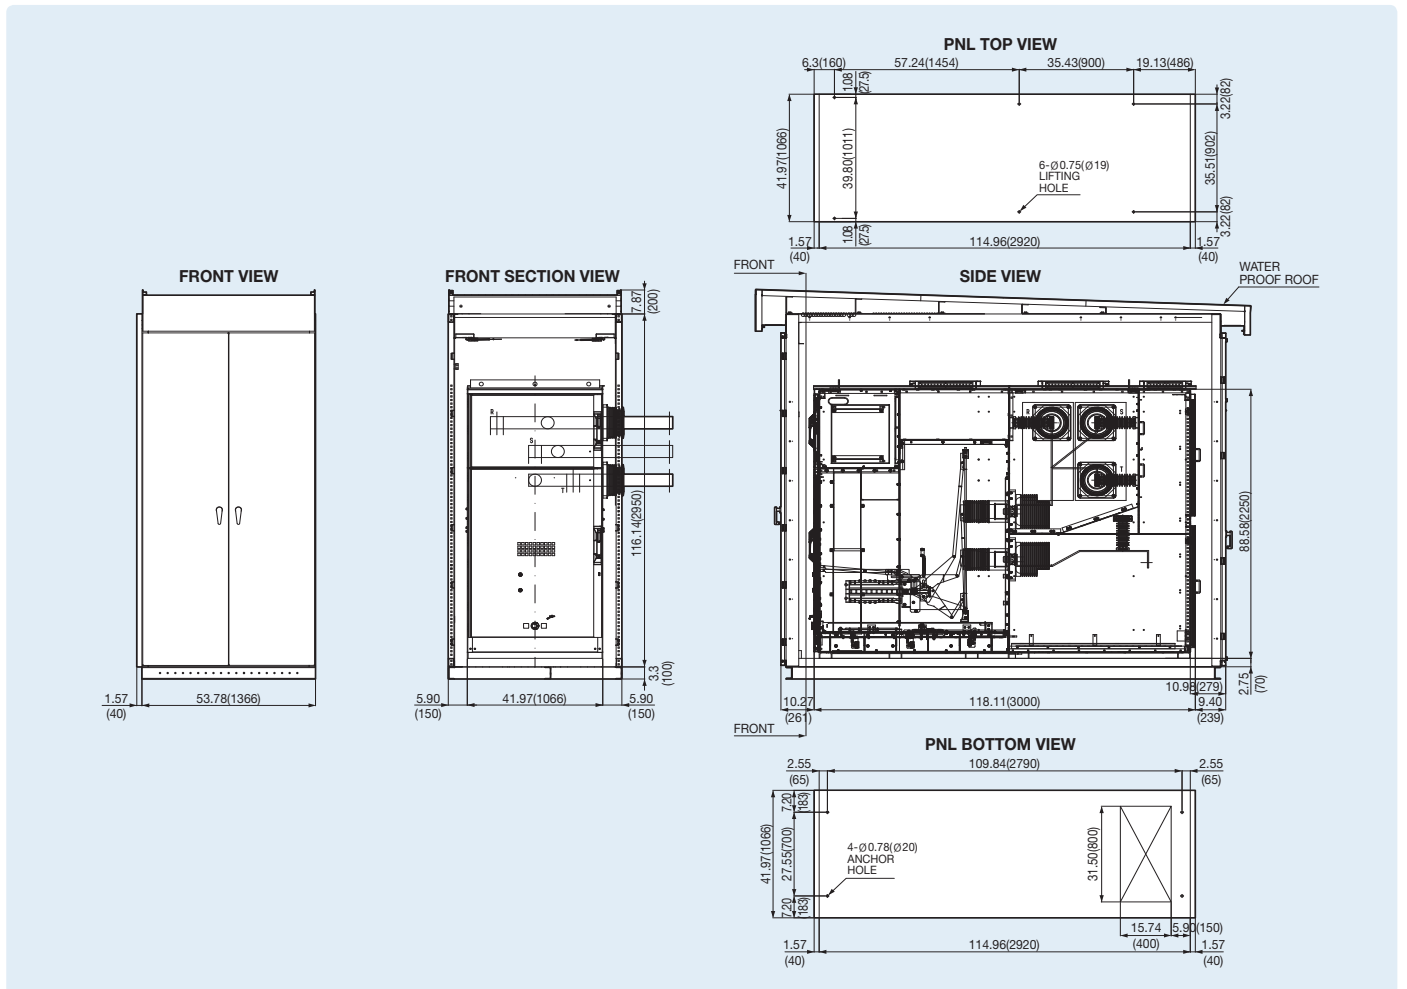



# UL/ANSI MCSG Designation

UL/ANSI Medium Voltage  
Metal Clad Switchgear

<b>UM</b>	<b>2</b>	<b>15</b>	<b>A</b>	<b>32</b>	<b>B</b>	<b>12</b>
<b>UL/ANSI MCSG</b>	<b>High (Stack) <small>Note1</small></b>	<b>Voltage</b>	<b>Arc resist.</b>	<b>S.C STC <small>Note2</small></b>	<b>Size (wide) <small>Note3</small></b>	<b>Current</b>
	1 1High	05 4.76kV	A Arc Resistance Gear	25 25kA	A 23.6" (600mm)	12 1200A
	2 2High	15 15kV	N Non-Arc Resistance Gear	32 31.5kA	B 29.5" (750mm)	20 2000A
		38 38kV		40 40kA	D 42" (1,066mm)	

Note)

1. 2High is not applicable for 38kV.

2. 25/31.5kA can be selected for 4.76/15kV.

31.5/40kA can be selected for 38kV.


3. Both 23.6" and 29.5" are available for 4.76/15kV 25/31.5kA 1200A AR Gear.

Only 29.5" is available for 4.76/15kV 25/31.5kA 2000A AR gear and 4.76/15kV 25/31.5kA 1200/2000 Non-AR gear.

Only 42" is available for 38kV 31.5/40kA 1200/2000A AR and Non-AR gear.




# UL/ANSI MCSG Compartment



## Low Voltage Compartment

- Enough space to test and change the internal wiring easily.
- Wiring duct for panel connection at the top is made of steel.




## Cable compartment

- Sufficient space for wiring
- Insulation cap for the dielectric of Earthing switch
- Bottom incoming and outgoing (Top incoming and outgoing not available)



## CB Compartment

- C.B. can be drawn in and out without opening the door.
- Viewing window for C.B. inspection
- Solid structure with hinge and locker
- Metal shutter and shutter padlock
- IP cover on the face of C.B

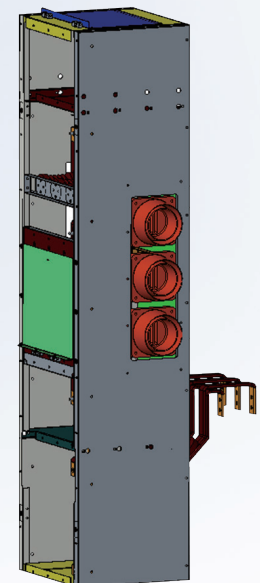


## Bus Compartment

- Independent bus compartment structured not to affect any accident to adjacent panels .

### Shutter Padlock

The hole to lock the shutters (load and line side) in close position, to increase the safety during the maintenance of a VCB draw-out position.



### Inspection window

Viewing window permits view of the status of the breaker through the closed door.

### Emergency trip device

C.B. can be tripped by trip device without opening the door.

### Mechanical position indicator

Indicate the service and test position of C.B.

### Draw-in and out device

C.B. can be drawn-in and out with the door closed.

### Plug-in Interlock


This device prevents the C.B. is separated from the Jack terminal in case of the C.B. in the service position.

### Interlocking device between door and C.B.

When the C.B. is in service position, operator can not open the door without releasing the door interlock.

### Truck 3-Position Withdraw Structure

Truck 3-Position Withdraw Structure was reviewed for ANSI Standard about Susol VCB (LS VCB).

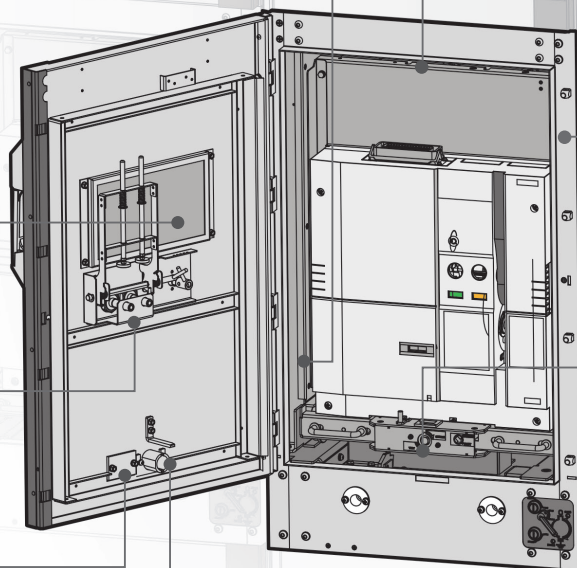



# Susol VCB

Vacuum Circuit Breaker, VCB is installed in the medium voltage distribution lines to protect life and load equipment. In case of accidents such as over current, short circuit and ground fault current, VCB works by interrupting the circuit through the inner Vacuum Interrupter which is acted by signal from the outside separate relay.

Susol VCB responds.

- customer needs for the breakers with high interrupting capacity and large current due to the integration and increase of the load capacity.
- worldwide trend of diversification in the medium voltage distribution lines.
- increase of the reliability for the temperature characteristics of circuit breakers.

Premium-type products to improve convenience and reliability of medium voltage switchgear configuration.

- full line-up modeling to the high interrupting capacity and large current.
- main structure with high reliability application.
- a variety of accessories and ability to maximize.

Suitable for use as the main circuit breaker to protect key installations in the places such as device industry, power plants, high-rise buildings, large ships.





- ▶ Strengthening of the high interrupting capacity and large current models and full line-up new VCB models to high/middle/low.

Voltage	Interrupting current	Rated current
05/15kV	25/31.5/40/50kA	1200/2000/3000A
27kV	25kA	1200A
38kV	31.5/40kA	1200/2000A

- ▶ Main circuit structure with high reliability.
  - Maximizing the durability and reliability of the main circuit contactors (Stego Tulip contactor).
  - Strong structure for the temperature rise (Natural cooling system).
- ▶ Convenience of switchgear configuration and a variety of accessories.
  - CB compartment structure: Metal isolation structures to prevent the accident spread and ensure safety. And the convenience of switchgear building is extended by its module style.
  - A variety of accessories: UVT, Locking Magnet, Plug Interlock, Key lock, Temperature Sensor, MOC, TOC, Earthing S/W.
  - Maximizing compatibility with existing products through the dualistic deployment of phases and compact models.


※ Type testing is complete for all models according to latest standard.  
 IEEE Std C37.09, IEEE Std C37.20.2, ANSI C37.54, ANSI C37.55, UL (CSA)







# Main circuit structure with high reliability

# Susol VCB

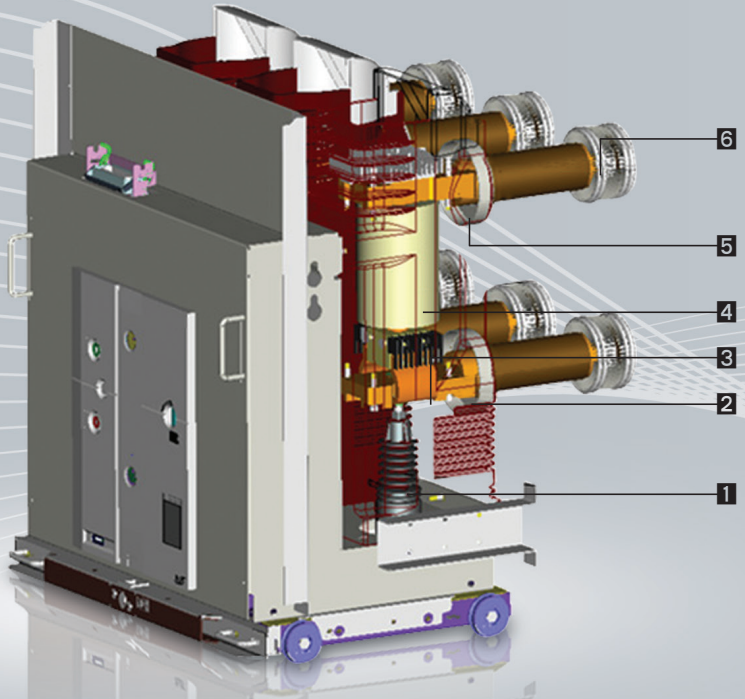

### Breaker

- 1 Insulation rod
- 2 Lower terminal
- 3 Shunt
- 4 Vacuum interrupter
- 5 Upper terminal
- 6 Tulip contactor

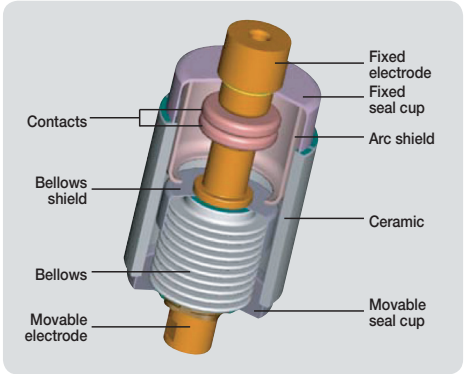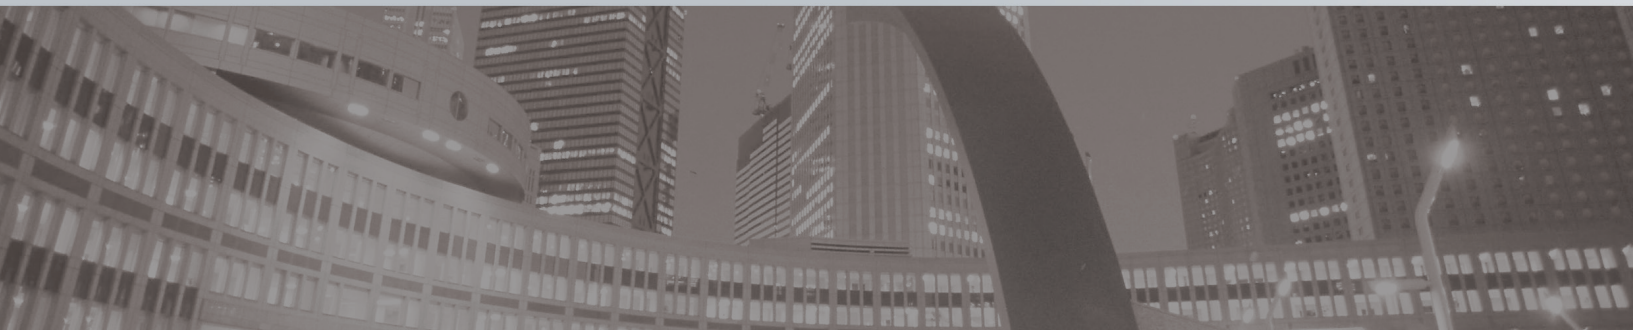

### Vacuum Interrupter, VI

The vacuum rate within the VI is very high (approximately  $5 \times 10^{-5}$  Torr) and the spacing between fixed contact and movable contact is about 6~20mm, depending on the voltage. The contacts are in a structure that arc can easily be extinguished and the surfaces of

the contacts are made of special alloy (copper-chromium) and the interior is completely sealed to prevent loss of vacuum. Therefore the wearing of the contacts can be minimized in the event of short-circuit and the arc energy by overvoltage or switching can be reduced effectively.



# Convenience and Variety

- Maximizing the durability and reliability of the main circuit contactors (Stego Tulip contactor)
- Strong structure for the temperature rise (Natural cooling system)






# Stego Tulip

Main circuit structure with high reliability

- Maximizing the durability and reliability of the main circuit contactors (Stego Tulip contactor)
- Strong structure for the temperature rise (Natural cooling system)

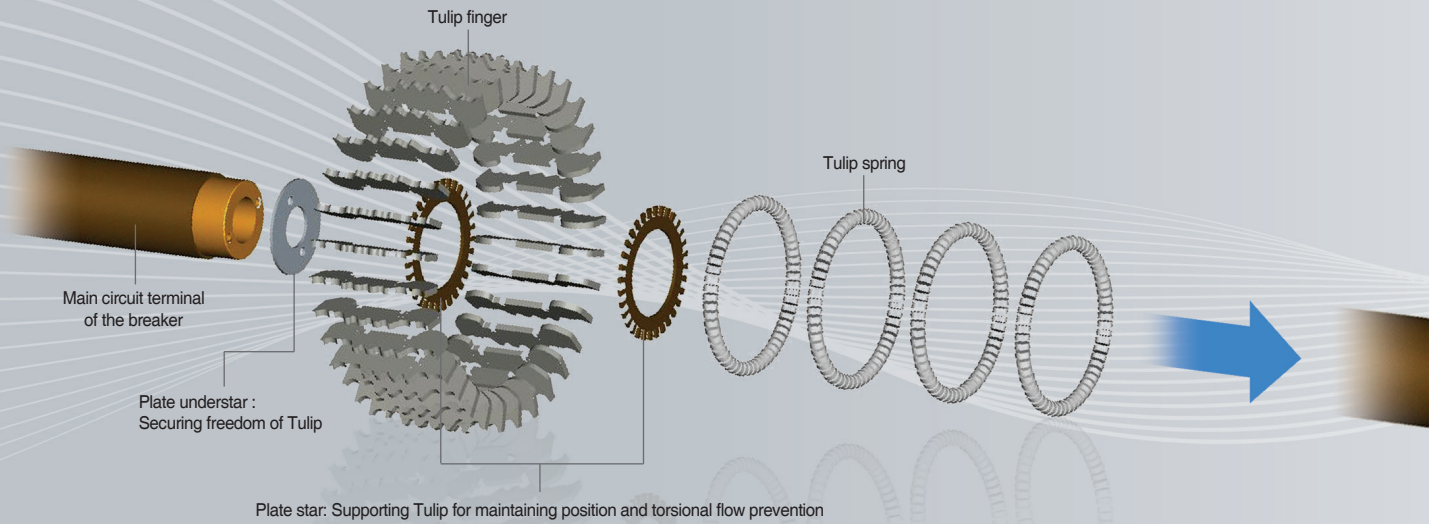



## Structure of Stego Tulip Terminal

- Maintaining the connection between breaker and cradle for the optimum current path through securing freedom of Tulip.
- Increasing the heat dissipation area of the contactors and minimizing aging.



# 4.76/15/27/38kV ... (UVL-05/15/27, VH-05/15, UVH-38)

- Drawout / natural cooling system
- Improved temperature characteristics and ensured high reliability

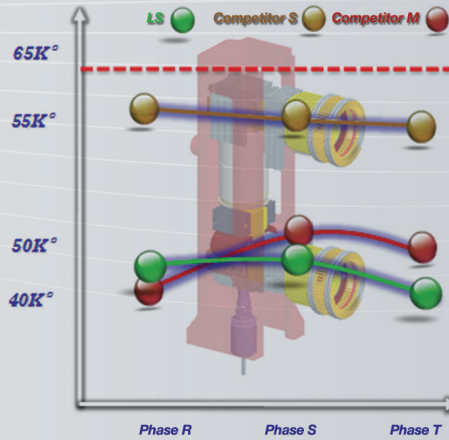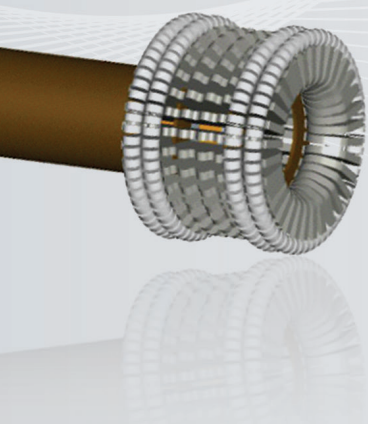

UVL type Tulip contactor



VH Type Tulip contactor



UVH type Tulip contactor



# Susol VCB & VCB compartment

## VCB types and ordering information

### UVL-05/15/27

#### Breaker

**UVL** — **15** **H** **32** **A** **12**

Basic model name		Rated voltage (kV)		Version		Interrupting current (kA)		Phase distance/Compatibility		Rated current (A)	
UVL	Susol VCB	05	4.76	P	Fixed	25	25	A	150mm	12	1200A
		15	15	H	H type drawout (for MCSG)	32	31.5	B	210mm	20	2000A
		27	27					C	254mm		
								D	275mm		
								R	150mm(Compact MCSG)		
								S	210mm(Compact MCSG&CI)		

**P type**  
 - 4.76/15kV 25/31.5kA 1200/2000A (Phase 150/210/254)  
 - 27kV 25kA 1200A(Phase 254)

**H type**  
 - 4.76/15kV 25/31.5kA 1200A (Phase 150/210)  
 - 4.76/15kV 25/31.5kA 2000A (Phase 210)  
 - 4.76/15kV 25/31.5kA 1200A (Phase 150/210, Compact MCSG)  
 - 4.76/15kV 25/31.5kA 2000A (Phase 210, CI)

**UVL-15H32A12** — **M1** **C1** **T1** **SB2** **U1** **A** **13 ...**

Motor control voltage		Trip coil voltage		UVT		Other accessories <sup>Note)</sup>	
M0	Without motor	T0	Without trip coil	U0	Without UVT	A1	Secondary Trip coil
M1	DC 110V	T1	DC 110V	U1	DC 110V	A2	Secondary Trip Coil with TCS Contact
M2	DC 200~250V	T2	DC 200~250V	U2	DC 200~250V	A3	Position s/w(Test: 1a1b, Service: 2b)
M3	DC 125V	T3	DC 125V	U3	DC 125V	A4	Position s/w(Test: 2a, Service: 2a)
M4	DC 24V~30V	T4	DC 24V~30V	U4	DC 24V~30V	A5	Position s/w(Test: 1a1b, Service: 1a1b)
M5	AC 48V~60V	T5	AC 48V~60V	U5	AC 48V~60V	A7	Keylock
M6	AC 48V	T6	AC 48V	U6	AC 48V	A8	Button Padlock
M7	AC 100V~130V	T7	AC 100V~130V	U7	AC 100V~130V	A9	Button cover
M8	AC 200V~250V	T8	AC 200V~250V	U8	AC 200V~250V	AA	Lead Wire

**Note) UVT is only applicable for Fixed type (P type)**

Closing coil voltage		Connector and wire	
C0	Without closing coil	SA2	A type connector, 4a4b
C1	DC 110V	SA4	A type connector, 10a10b
C2	DC 200~250V	SB2	B type connector, 4a4b
C3	DC 125V	SA4	B type connector, 10a10b
C4	DC 24V~30V		
C5	DC 48V~60V		
C6	AC 48V		
C7	AC 100V~130V		
C8	AC 200V~250V		


- Note)
- In case of selecting accessories such as A1(Secondary coil), A4(position S/W 2a2a), A7(key lock), A147 is type name in the ordering.
  - Unable to select A1(Secondary Trip Coil),U1~U8(UVT) simultaneously.
  - A3(Position S/W 1a3b), A4(Position S/W 2a2b) and A5(Position S/W 2a2b) can not be selected simultaneously.
  - A1(Secondary Trip Coil) and A2(Secondary Trip Coil with TCS Contact) can not be selected simultaneously.
  - A8(Button Padlock) and A9(Button Cover), AP(Button Padlock In Open) can not be selected simultaneously.
  - A7(Keylock), AM(KirkKey, CAMLOCK Type), AN(KirkKey, CN22 Type), AP(KirkKey, Double CAMLOCK Type) can not be selected simultaneously.
  - When A1(Secondary Trip Coil) is selected the maximum available auxiliary contacts are 9a9b.
  - When A2(Secondary Trip Coil with TCS Contact) is selected the maximum available auxiliary contacts are 4a3b, 9a8b.
  - H type breaker includes options such as AC(Plug Interlock), AD(Padlock(H Type)), AE(MOC) as standard.
  - AI (Mecha Shaft Interlock Lever) is available only for 12kV, P type

# Susol VCB & VCB compartment


## VCB types and ordering information

UL/ANSI Medium Voltage  
Metal Clad Switchgear


### Cradle

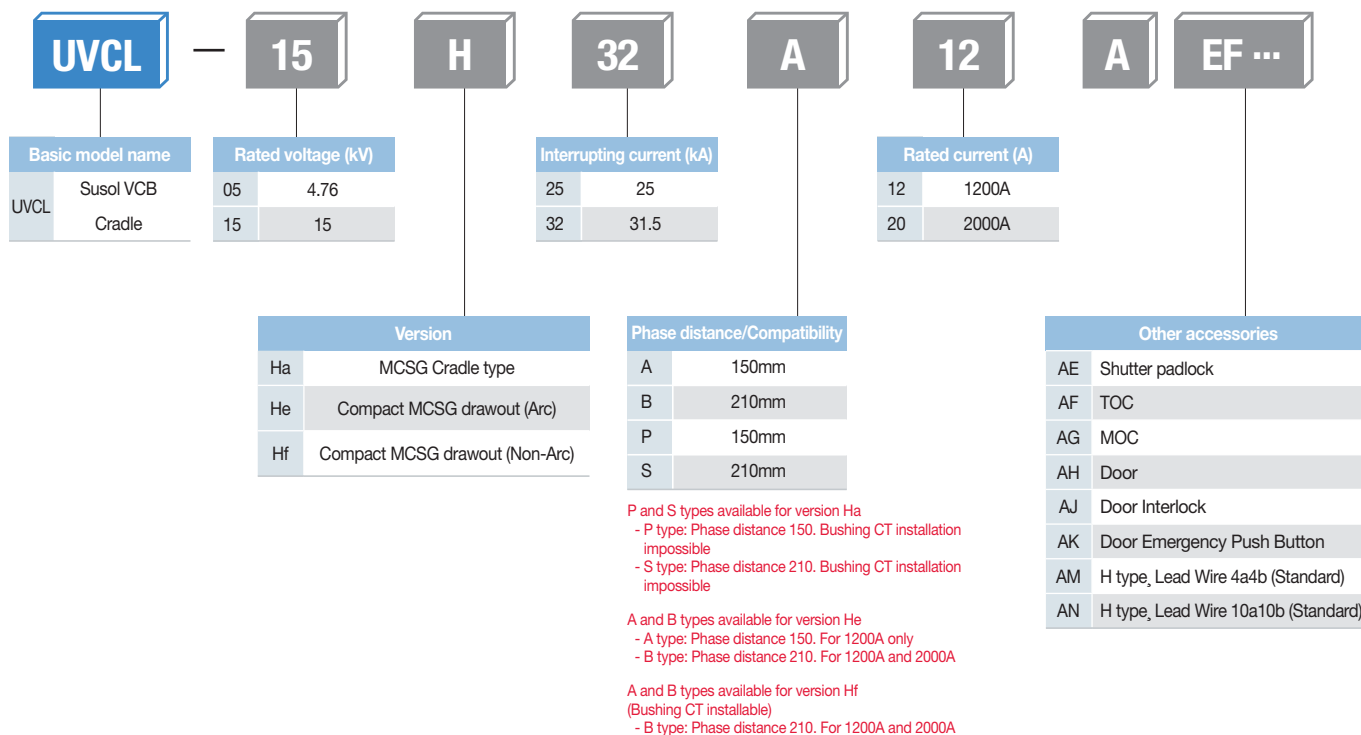

- Note) 1. Ha type cradle cannot choose a door and door options. You can use a door for He, Hf type cradle only.  
 2. AJ and AK can not be chosen without door(AH).  
 3. H type lead wire(AM, AN) is required for cradle in case of using H type breaker.  
 4. If H type breaker is chosen A8 or A9 or AX then cradle could not choose AK.  
 5. H type cradle includes options such as AE(Shutter padlock), AE(TOC), AG(MOC), AH(Door), AJ(Door Interlock) as standard.



Ha type

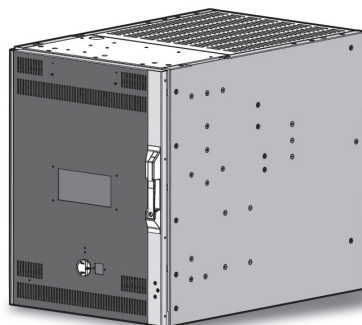

He, Hf type





# Susol VCB & VCB compartment

## VCB types and ordering information

### UVH-38

#### Breaker

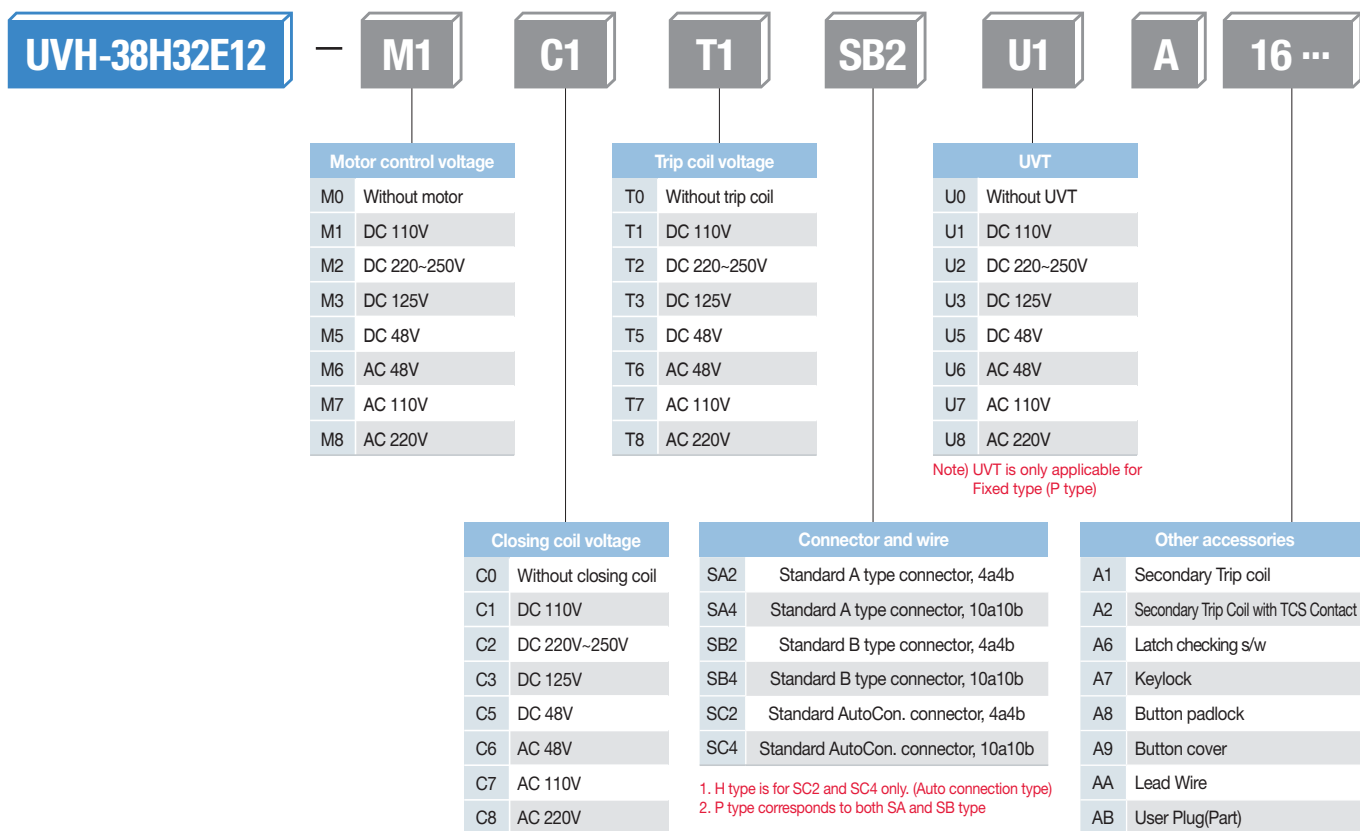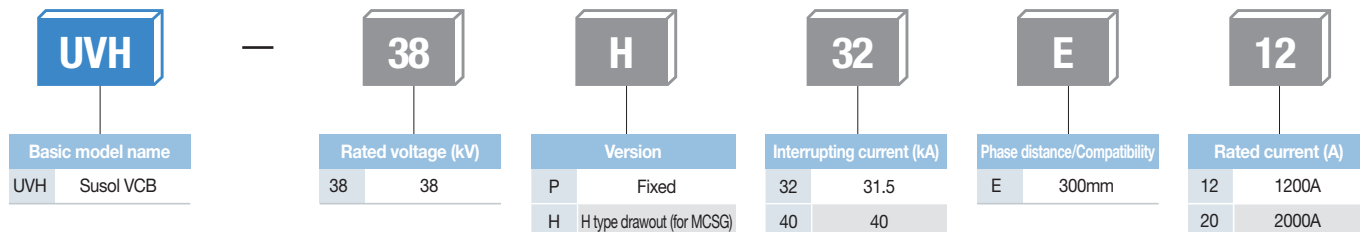

Note)

- In case of selecting accessories such as A1(Secondary coil), A7(key lock), A8(Button Padlock) A178 is type name in the ordering.
- Unable to select A1(Secondary Trip Coil),U1~U8(UVT) simultaneously.
- A1(Secondary Trip Coil) and A2(Secondary Trip Coil with TCS Contact) can not be selected simultaneously.
- A8(Button Padlock) and A9(Button Cover) can not be selected simultaneously.
- When A2(Secondary Trip Coil with TCS Contact) is selected the maximum available auxiliary contacts are 4a3b, 9a9b.
- H type breaker includes options such as AE(MOC) as standard.
- In case of selecting UVT, A6(Latch checking S/W) is not allowed.  
A6 (Latch checking S/W) is installed by default to make electrical interlock with UVT.


Optional	
CTD1	Condenser Trip Device(AC110V)
CTD2	Condenser Trip Device(AC220V)
UDC1	UVT Time Delay Controller(ADC110V)
UDC2	UVT Time Delay Controller(ADC220V)
UDC3	UVT Time Delay Controller(ADC48V)
CTU	Coil Test Unit

# Susol VCB & VCB compartment

## VCB types and ordering information

UL/ANSI Medium Voltage  
Metal Clad Switchgear

### Cradle

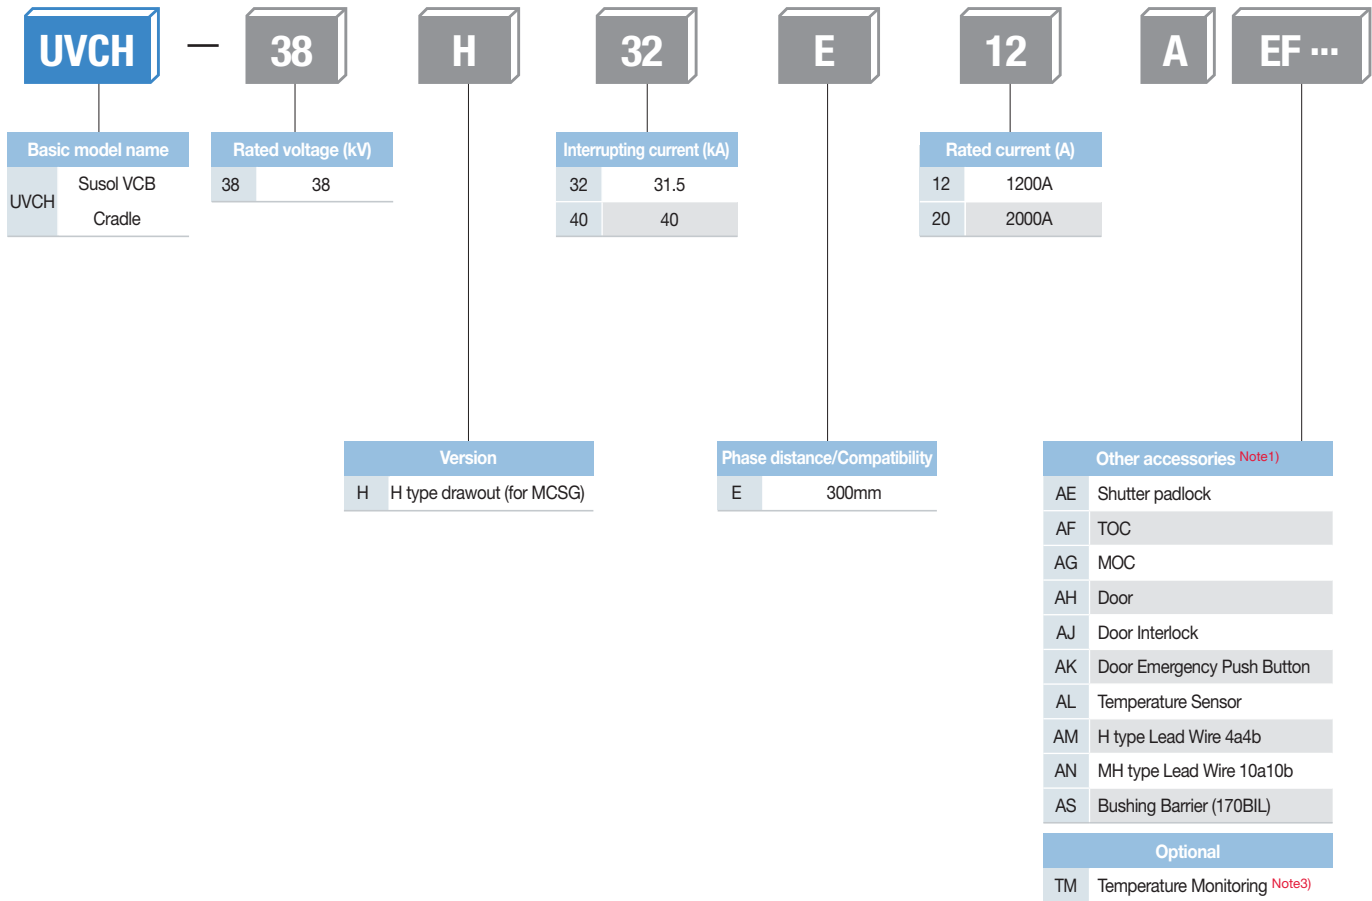

- Note) 1. AJ and AK can not be selected without AH.  
 2. H type lead wire - one of AM, AN is required for cradle in case of H type breaker.  
 3. If H type breaker options A8 (Button Padlock) and A9 (Button Cover) are selected the cradle option AK (Door Emergency Push Button) is not available.  
 4. H type cradle includes options such as AE (Shutter padlock), AE (TOC, AG (MOC), AH (Door), AJ (Door Interlock) as standard.

# CB compartment

Convenience in building switchgears

- CB compartment structure: H type cradle
- Metal isolation structure to prevent the accident from spreading and ensure safety
- Convenience of switchgear building



## 4.76/15/27/38kV 25/31.5/40/50kA

- Metal isolation structure to prevent any accident spread and ensure operator's safety
- Convenience of operation by using Truck
  - Operator is able to withdraw CB without door open
  - Mechanically CB position indicator on the front side of SWGR
- Equipped with safety devices and accessories
  - Metallic shutter
  - Door interlock
  - Plug-in interlock
- Convenience assembly of switchgear
  - Module structure enhance productivity

1 High Level MCSG (S5/15 UL AR)



### Accessories of CB compartment (H type cradle)

- MOC (Mechanism Operated Cell S/W)
- TOC (Truck Operated Cell S/W)
- Shutter Padlock
- Door Emergency ON/OFF Button

2 High Level MCSG (S5/15 UL AR)



# Susol VCB & VCB compartment


## CB compartment

### CB compartment for S5/15 UL AR



### Structures and dimensions

[ Unit: inch(mm) ]

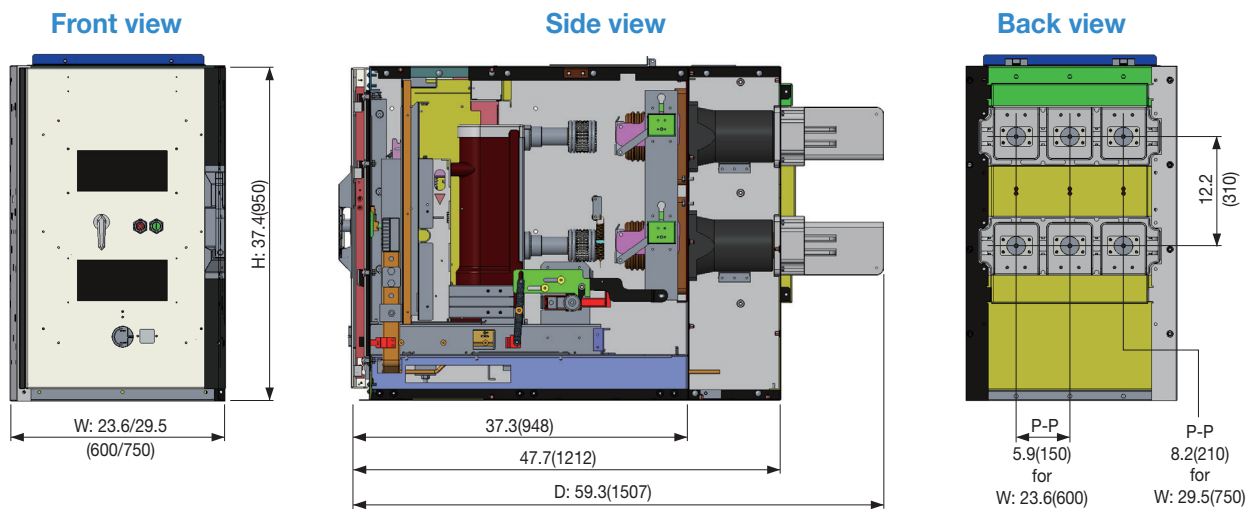


Type	Susol (UL)
Rated voltage / Current, kV/A	5~15kV / 1200, 2000A
Rated interrupting / Short time / Momentary current, Ik (kA)	25, 31.5kA / 2sec / 65, 82kAp
Rated interrupting time / Oper. duty	3 Cycle / O-0.3sec-CO-15sec-CO
AC , Impulse withstand voltage	36kV/1min, 60-95kV BIL, 1.2×50us
Aux. contacts	4a4b, 10a10b
Opening time, sec	≤0.04
Mechanical endurance / Cap. curt. swit., times	10,000 (M2) / C2
Applicable standard	IEEE Std C37.09, IEEE Std C37.20.2, ANSI C37.54, ANSI C37.55

# Susol VCB & VCB compartment CB compartment

UL/ANSI Medium Voltage  
Metal Clad Switchgear


## CB compartment for S5/15 UL NAR

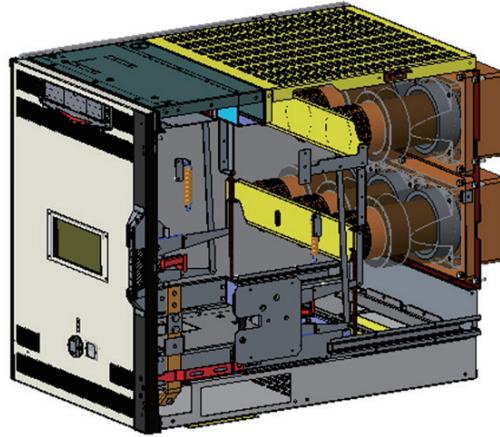


### Structures and dimensions

[ Unit: inch(mm) ]


Front view

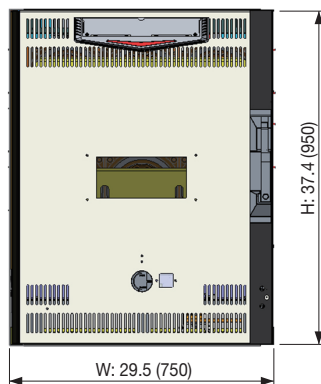

Side view

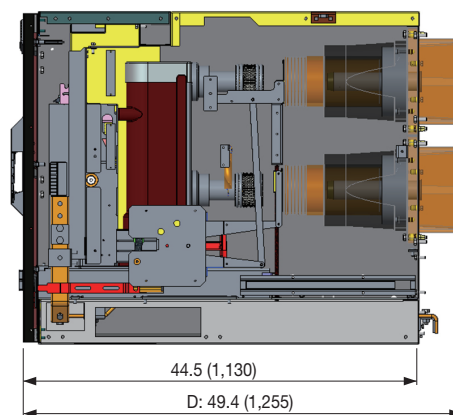

Back view

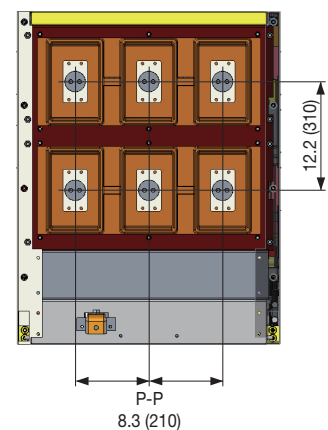


Type	Susol (UL)
Rated voltage / Current, kV/A	5~15kV / 1200, 2000A
Rated interrupting / Short time / Momentary current, Ik (kA)	25, 31.5kA / 2sec / 65, 82kAp
Rated interrupting time / Oper. duty	3 Cycle / O-0.3sec-C0-15sec-C0
AC , Impulse withstand voltage	36kV/1min, 60-95kV BIL, 1.2×50us
Aux. contacts	4a4b, 10a10b
Opening time, sec	≤0.04
Mechanical endurance / Cap. curt. swit., times	10,000 (M2) / C2
Applicable standard	IEEE Std C37.09, IEEE Std C37.20.2, ANSI C37.54, ANSI C37.55

# Susol VCB & VCB compartment


## CB compartment

### CB compartment for S38 ANSI AR & NAR

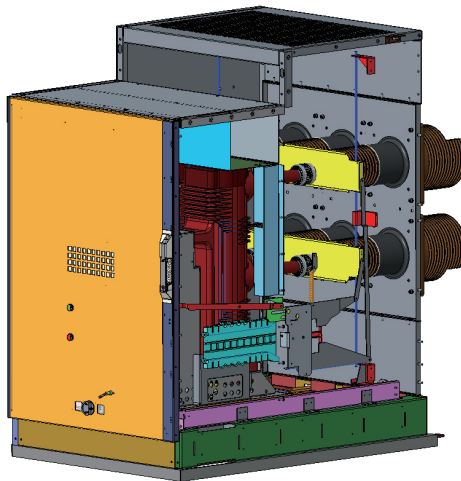

### Structures and dimensions




[ Unit: inch(mm) ]

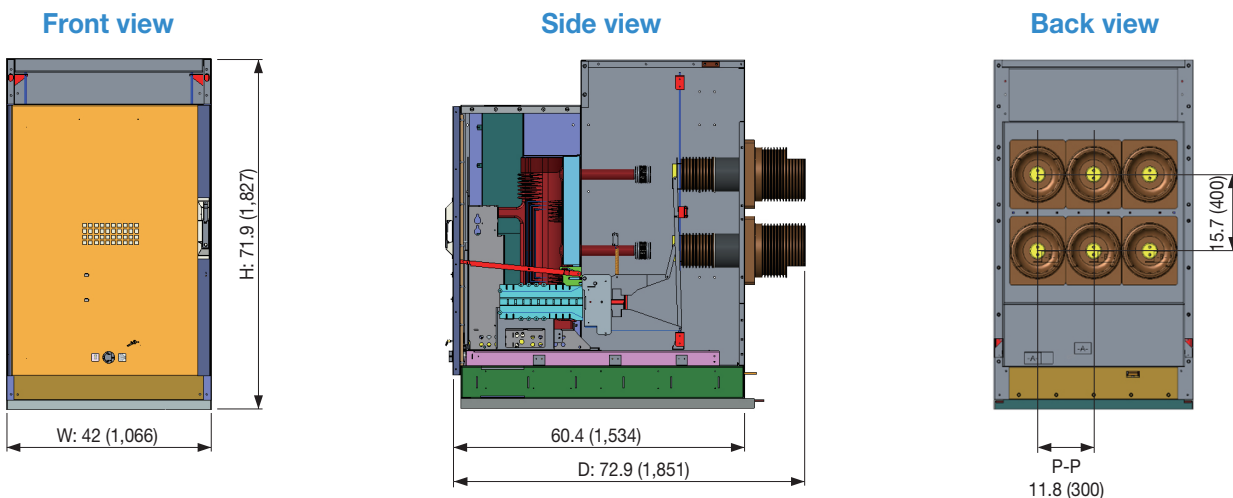

Type	Susol (UL)
Rated voltage / Current, kV/A	38kV / 1200,2000A
Rated interrupting / Short time / Momentary current, Ik (kA)	40A / 3sec / 104kAp
Rated interrupting time / Oper. duty	3 Cycle / O-0.3sec-C0-15sec-C0
AC , Impulse withstand voltage	80kV/1min, 150kV BIL, 1.2×50us
Aux. contacts	4a4b, 10a10b
Opening time, sec	≤0.04
Mechanical endurance / Cap. curt. swit., times	10,000 (M2) / C2
Applicable standard	IEEE Std C37.09, IEEE Std C37.20.2

### Arc duct for S5/15 UL AR


- Integral and module assembly type
- Easy assembly and extendable structure
- Required few parts

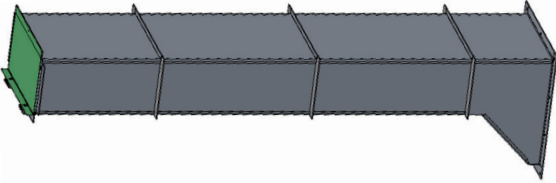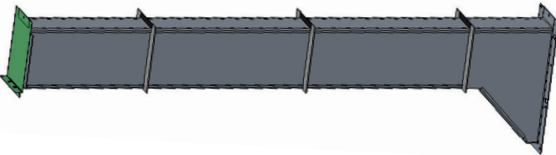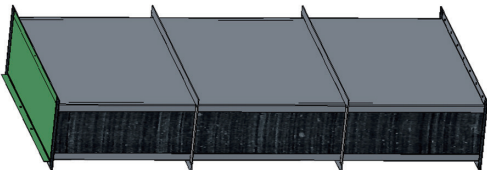No.	Itemcode	Product name	Picture
1	53524121001	DUCT ASS'Y, 1H, FRONT (1High)	
2	53524121002	DUCT ASS'Y, 1H, BACK (1High)	
3	53524122001	DUCT ASS'Y, DUCT, 2H (2High)	

### Size

#### DUCT ASS'Y,1H,FRONT

[ Unit: inch(mm) ]

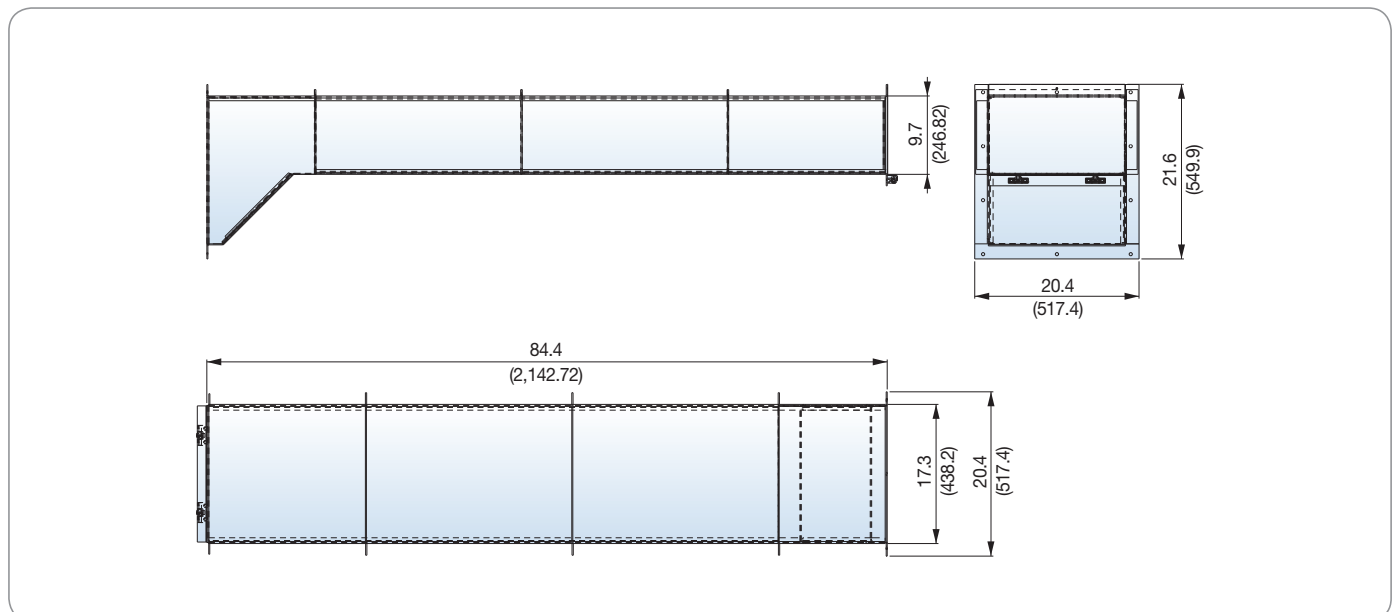




# Devices


## Arc duct

### DUCT ASS'Y, 1H, BACK

[ Unit: inch(mm) ]


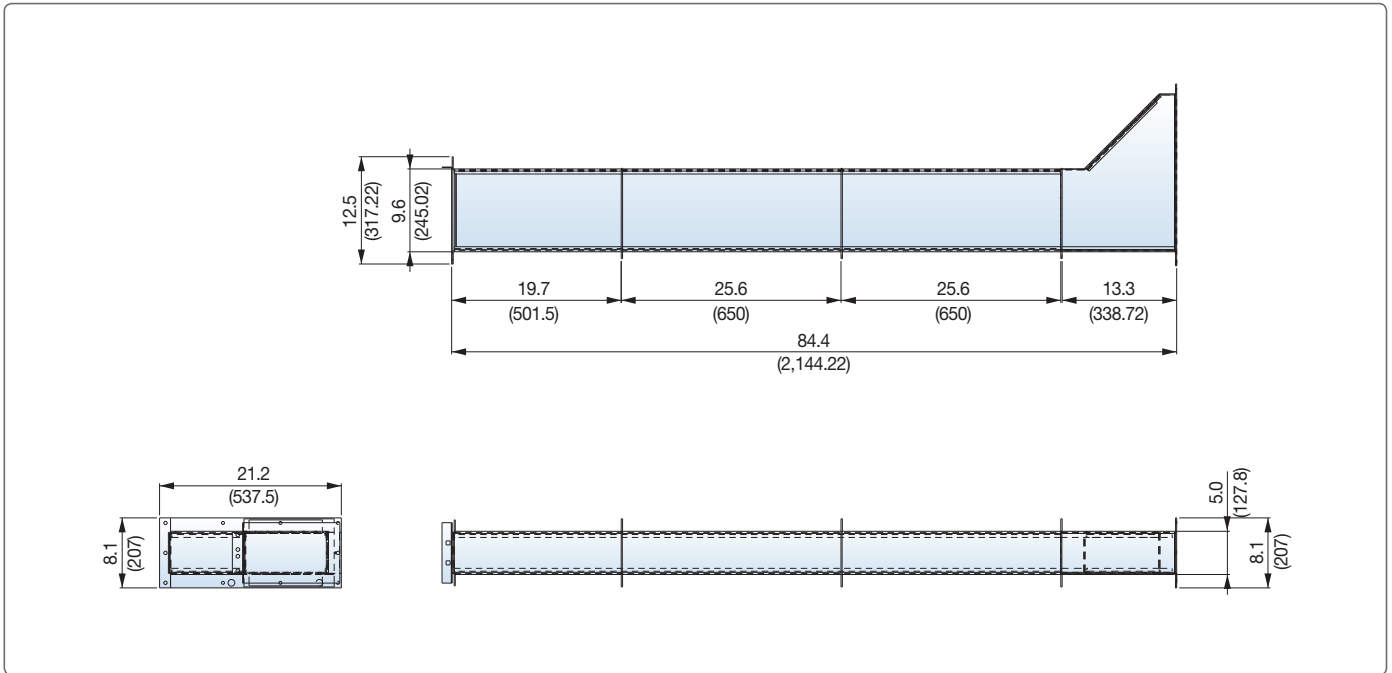


### DUCT ASS'Y, DUCT, 2H

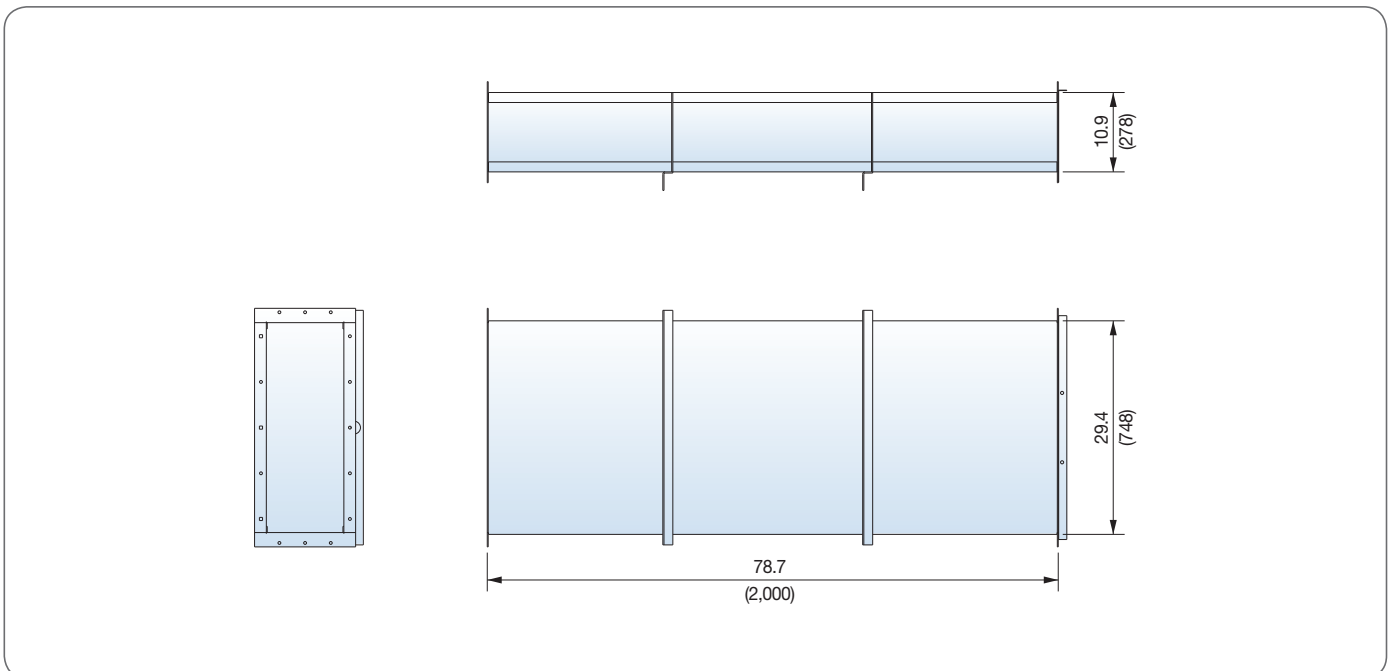

### Arc duct for S38 ANSI AR


- Integral and module assembly type
- Easy assembly and extendable structure
- Required few parts

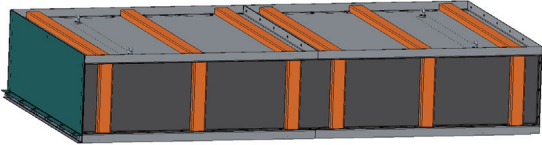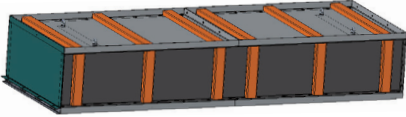No.	Drawing No.	Product name	Picture
1	W44324275	DUCT ASS'Y, REAR	
2	W44324293	DUCT ASS'Y, FRONT	

### Size

#### DUCT ASS'Y (REAR, FRONT)

[ Unit: inch(mm) ]

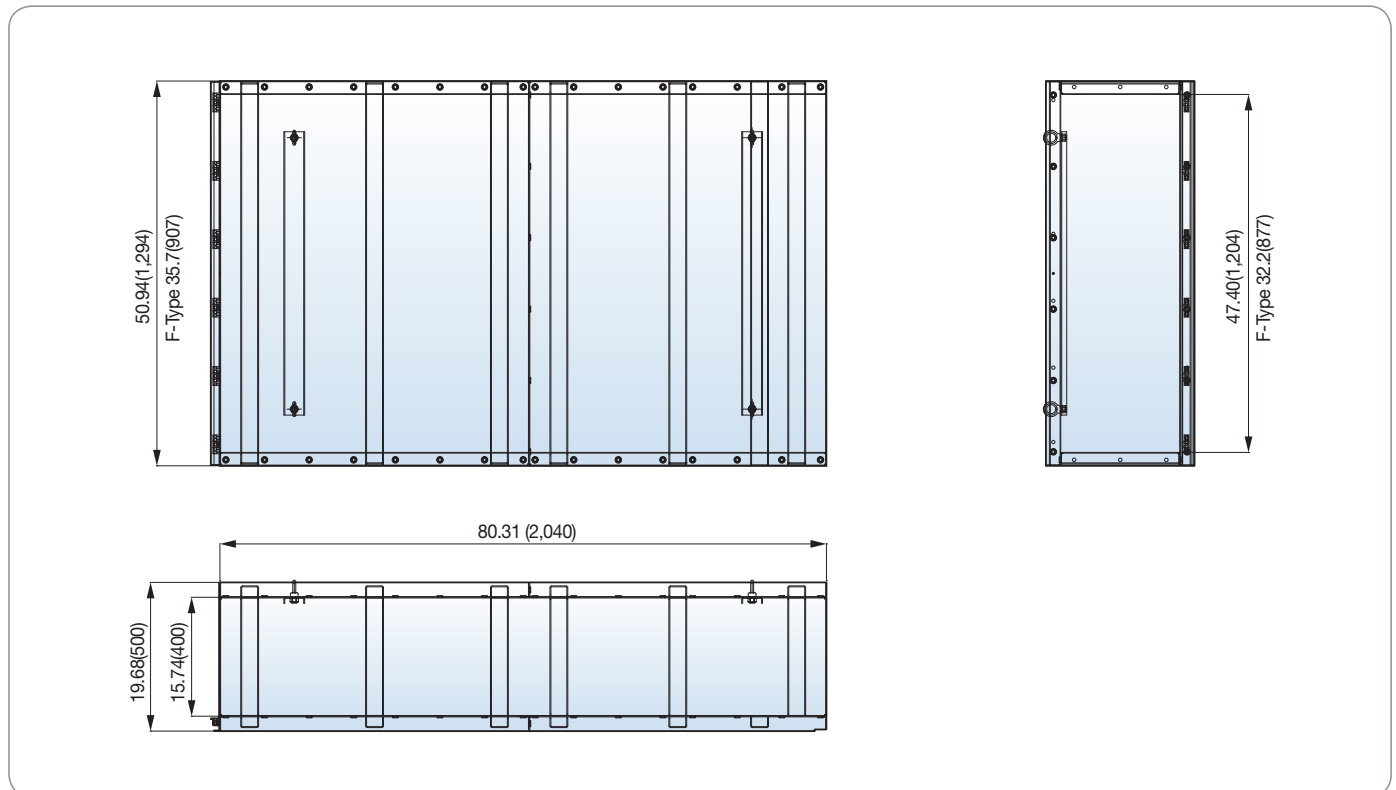


# Devices

## Ground & test device

### G&T device for S5/15 UL AR

[ Unit: inch(mm) ]

#### Dimensions

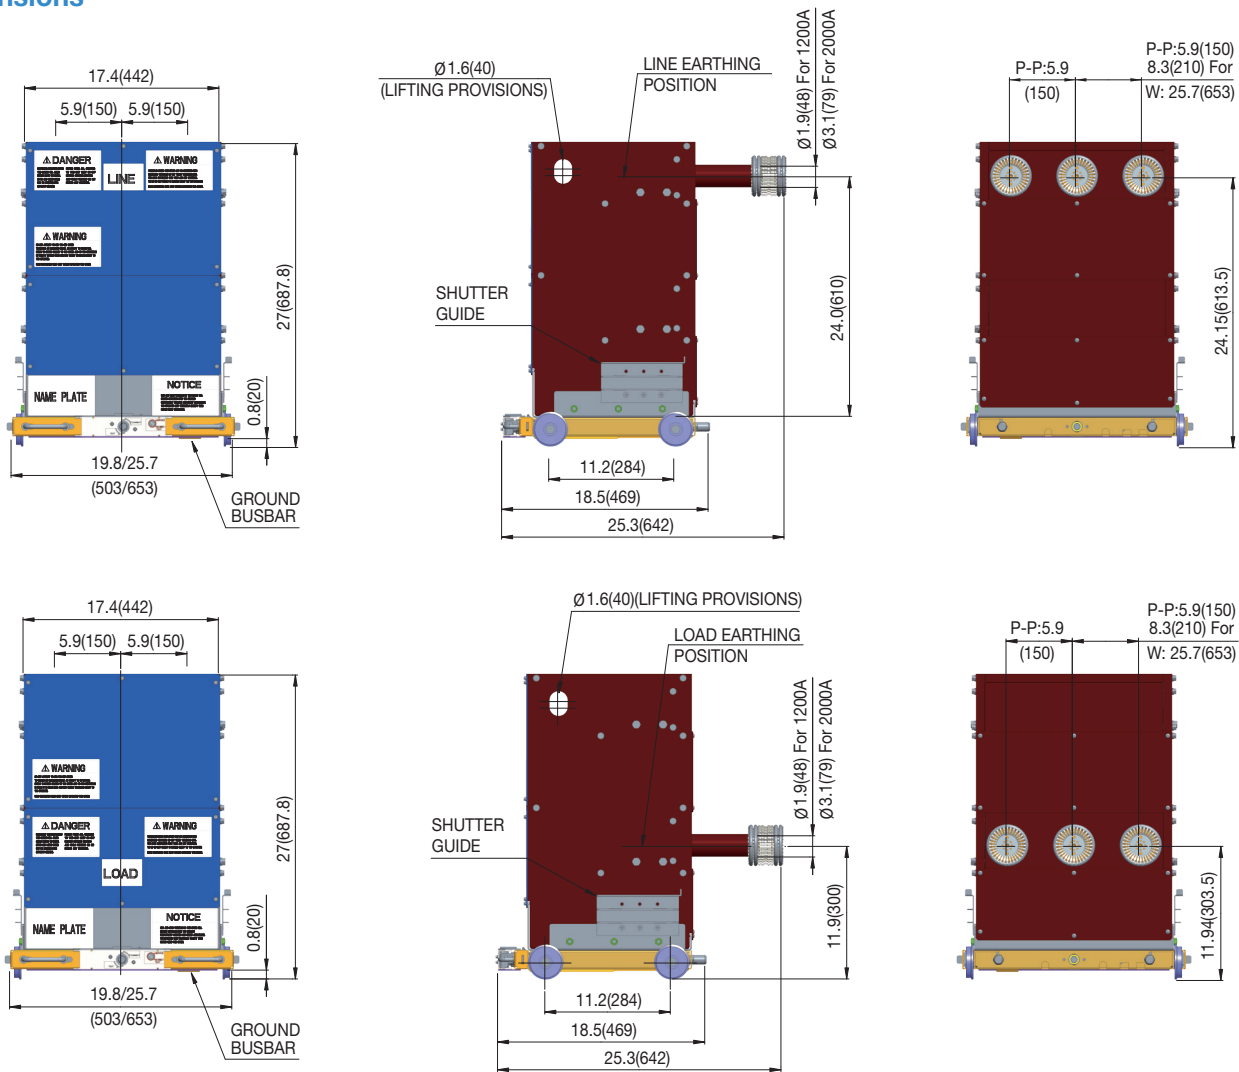


Model	Ground truck	
Rated voltage (kV)	5/15	
Rated current (A)	1200	2000
Phase distance, inch (mm)	5.9 (150)	8.3 (210)
Rated frequency (Hz)	60	
Rated power frequency withstand voltage (kV/1min)	19/36	
Rated lightning impulse withstand voltage (kV[1.2x50 $\mu$ s])	60/95	
Rated short-time withstand current (kA/s)	31.5/2 (Peak 81.9kA)	
Standard	IEEE Std C37.20.6	

### G&T device for S5/15 UL NAR

[Unit: inch(mm)]

#### Dimensions

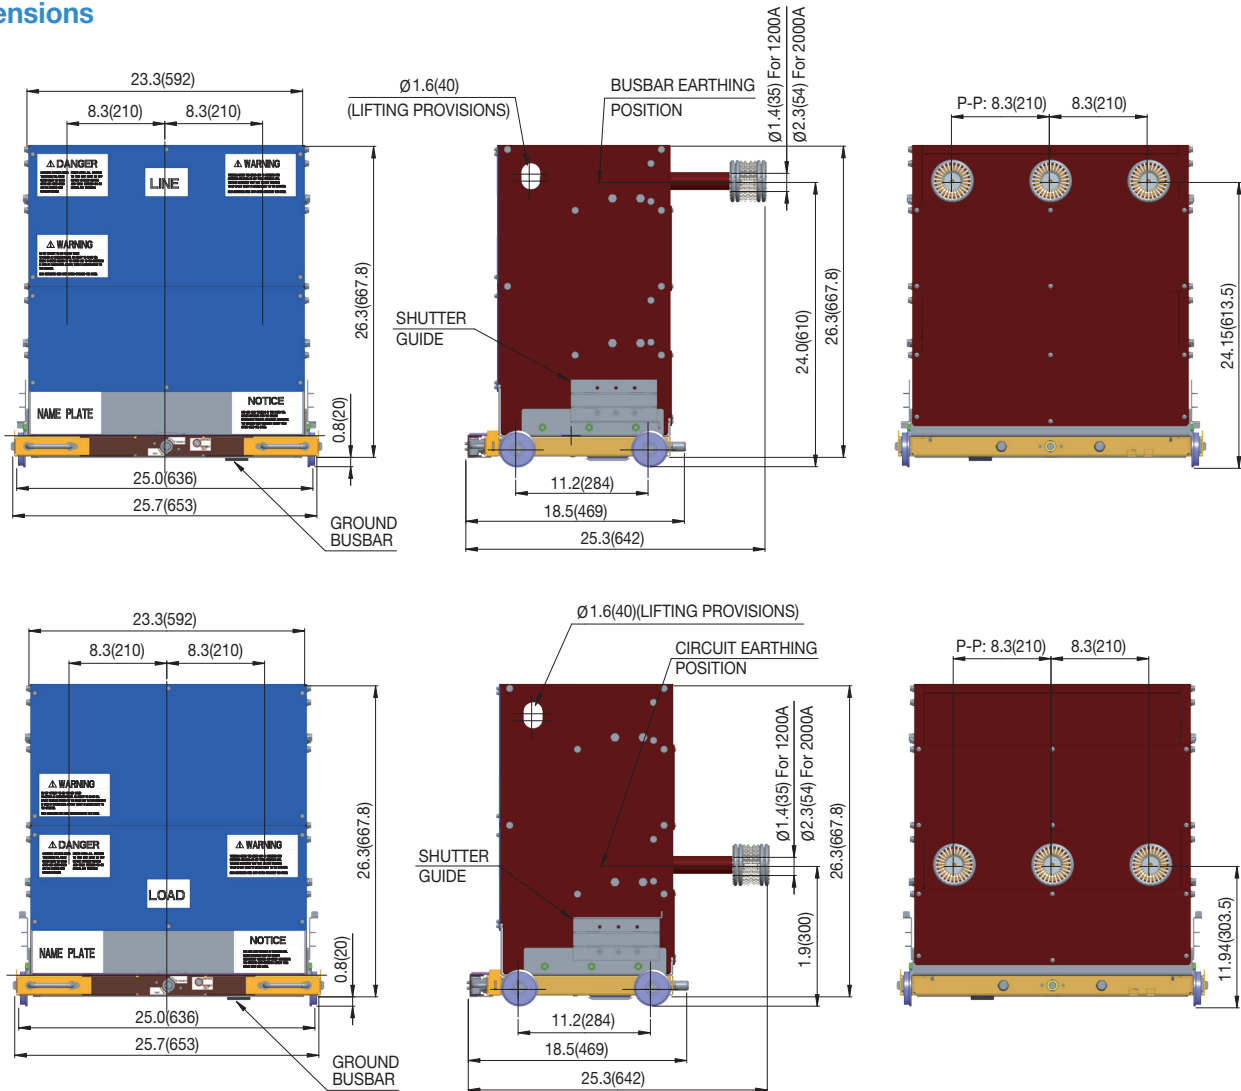

Model	Ground truck	
Rated voltage (kV)	5/15	
Rated current (A)	1200	2000
Phase distance, inch (mm)	8.3 (210)	
Rated frequency (Hz)	60	
Rated power frequency withstand voltage (kV/1min)	19/36	
Rated lightning impulse withstand voltage (kV[1.2x50µs])	60/95	
Rated short-time withstand current (kA/s)	31.5/2 (Peak 81.9kA)	
Standard	IEEE Std C37.20.6	




# Devices

## Ground & test device


### G&T device for S38 ANSI AR & NAR

[ Unit: inch(mm) ]

#### For upper terminal

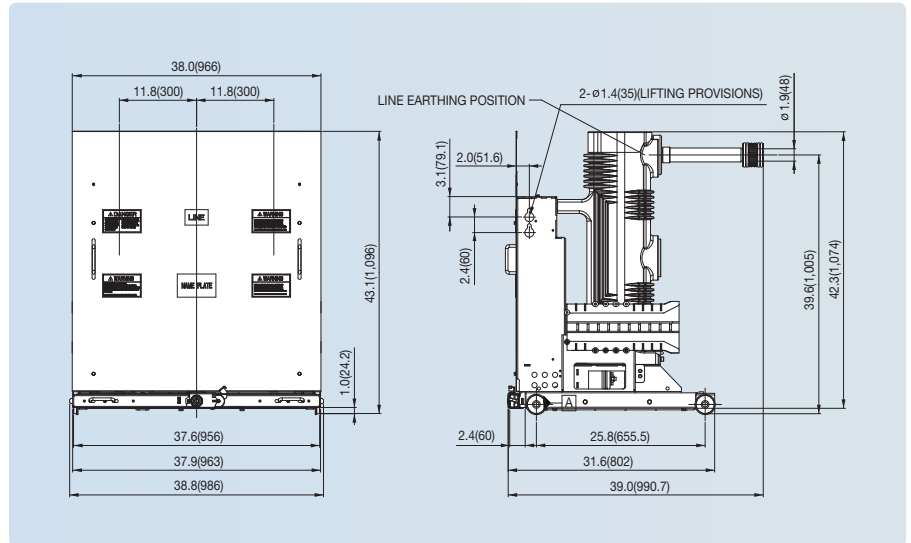

#### For lower terminal

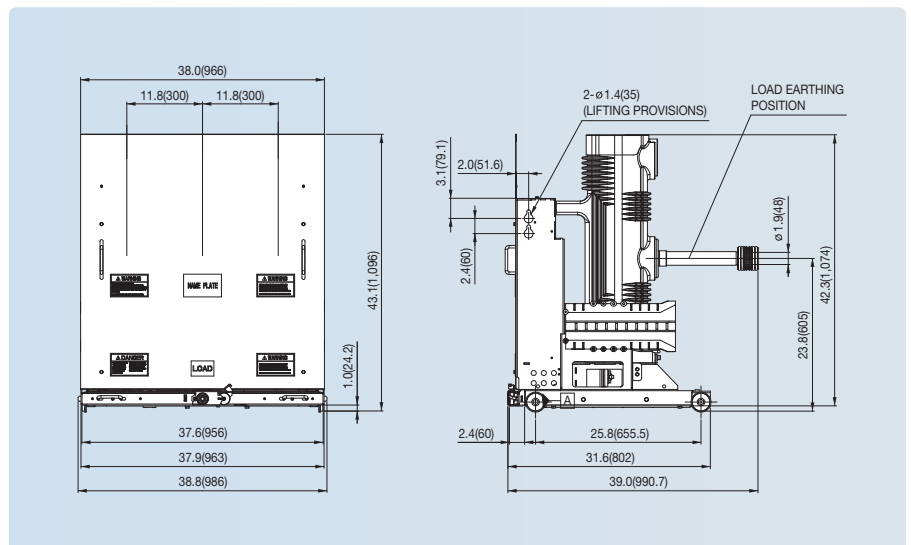

Model	Ground truck
Rated voltage (kV)	38
Rated current (A)	2,000
Phase distance, inch (mm)	11.8 (300)
Rated frequency (Hz)	60
Rated power frequency withstand voltage (kV/1min)	80
Rated lighting impulse withstand voltage (kV[1.2x50 ])	150
Rated short-time withstand current (kA/s)	40/2
Standard	IEEE Std C37.20.6

### Types and ordering information

<b>UVGT</b>		<b>15</b>		<b>Ms</b>		<b>32</b>		<b>A</b>		<b>12</b>	
<b>Basic model name</b>		<b>Rated voltage</b>		<b>Version</b>		<b>Interrupting current</b>		<b>Phase distance/Compatibility</b>		<b>Rated current</b>	
UVGT	Ground Truck	05	4.76kV	Ms	Simple manual devices	25	25kA	C	254mm	12	1200A
		15	15kV			32	31.5kA	E	300mm	20	2000A
		38	38kV			40	40kA	R	150mm (Compact MCSG)	30	3000A
						50	50kA	S	210mm (Compact MCSG)		
								U	210mm (Compact MCSG_NAR)		

1. 4.76/15kV 25/31.5kA  
- Phase distance 150/210mm, 1200/2000A can be applied

2. 4.76/15kV 40/50kA  
- Phase distance 254mm, 1200/2000/3000A can be applied

3. 38kV 31.5/40kA  
- Phase distance 300mm, 1200/2000A can be applied

<b>UVGT-15Ms32A12</b>	
<b>Other accessories</b>	
A	Two terminal set
B	One terminal set (Only upper terminal)
C	One terminal set (Only lower terminal)


# Devices

## Lifter


### Lifter for S5/15 UL AR & NAR

#### Top view


[ Unit: inch(mm) ]

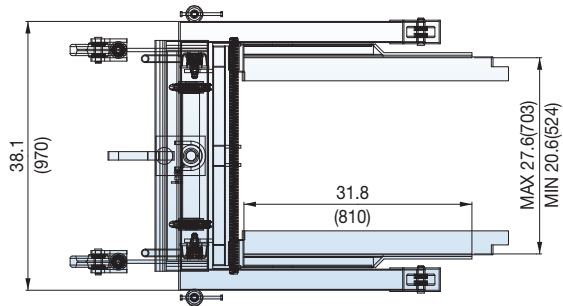

#### Side view

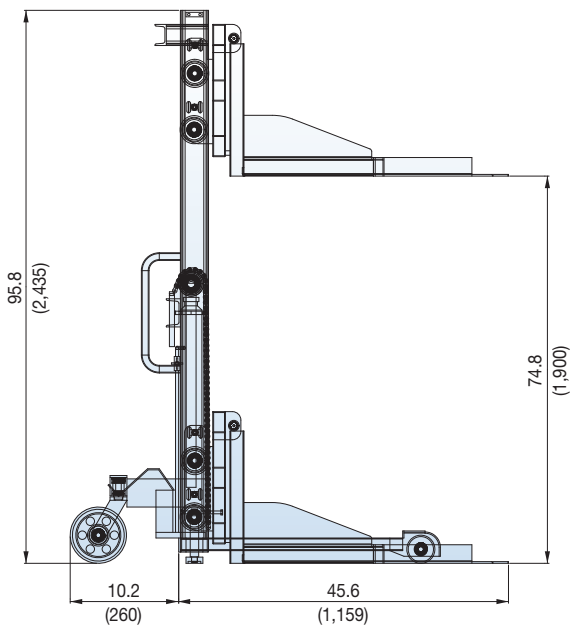

#### Front view

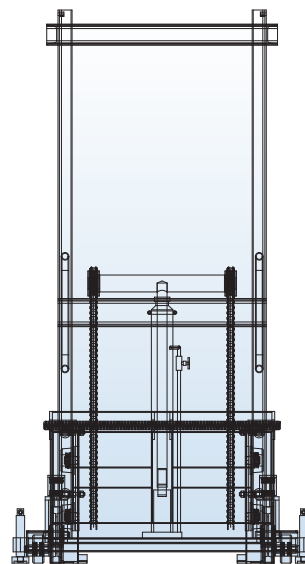


Property	Rating
Maximum live load (kg)	450
Maximum height for lift, inch (mm)	74.8 (1,900)
Size (W × H × D), inch (mm)	38.1×95.8×55.8 (970×2,435×1,419)
Weight (kg)	237


### Lifter for S38 ANSI AR & NAR

#### Top view


[ Unit: inch(mm) ]

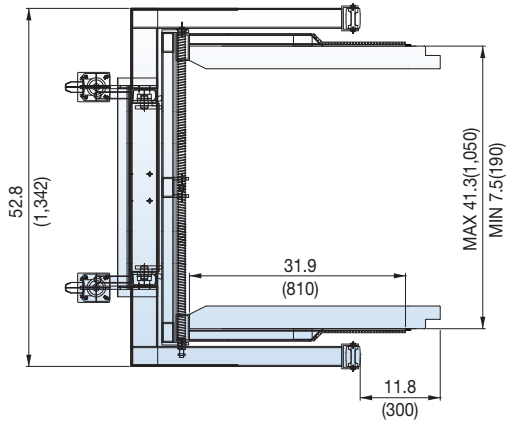

#### Side view

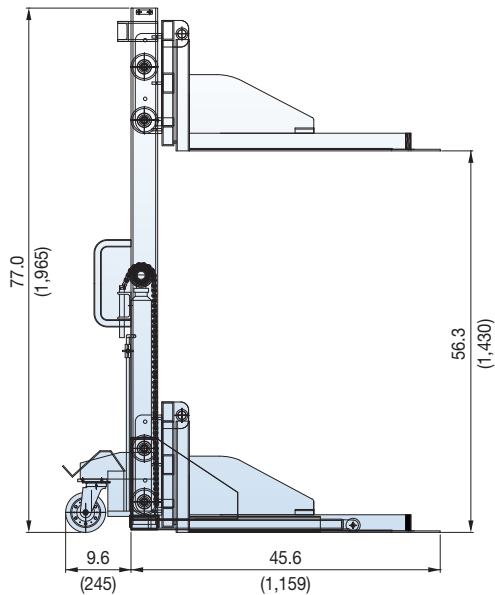

#### Front view

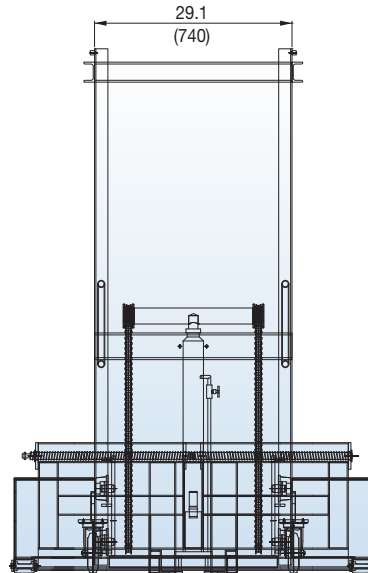


Property	Rating
Maximum live load (kg)	450
Maximum height for lift, inch (mm)	56.3 (1,430)
Size (W × H × D), inch (mm)	52.8 × 77.4 × 55.3 (1,342 × 1,965 × 1,404)
Weight (kg)	267



# Devices

## Current transformer

### Ordering information

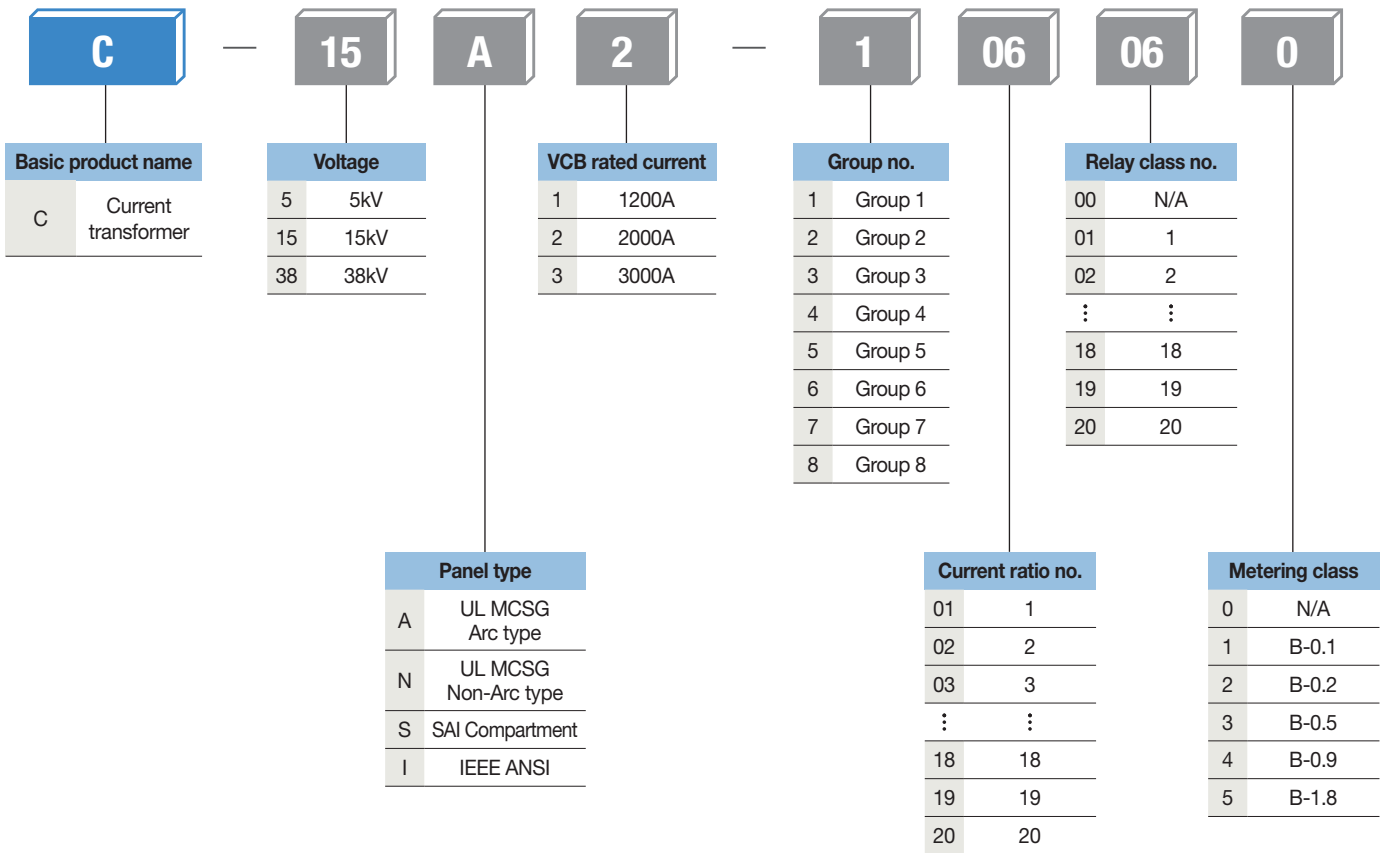

#### Ordering example 1)

- For 15kV Arc type 1200A MCSG
- 1-Core
- Current ratio : 300/1A
- Relay class : C200
  - ▶ C-15A1-205050

#### Ordering example 2)


- For 15kV Arc type 2000A MCSG
- 2-Core
- Current ratio: 1000/5/5A
- Relay class: C50
- Metering class: 0.3B0.5
  - ▶ C-15A2-413133

#### Ordering example 3)

- For 15kV Non-Arc type 2000A MCSG
- 2-Core
- Current ratio: 1200/5/5A
- Metering class: 0.3/0.3B1.8
  - ▶ C-15N2-312005

### CT for S5/15 UL AR

Model: UL-LSC-12 (C-5A1 or C-15A1)



Current rating Pri: sec Amperes	Continuous thermal current rating factor
50 : 5 ~ 1200 : 5	1.0

### UL-LSC-12 Selecting and ordering data

#### Group 1

1-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1	B0.2	B0.5	B0.9	B1.8					
1	100 / 5A	C20	0.6	1.2	2.4	-	-					
2	150 / 5A	C30	0.6	0.6	1.2	2.4	-					
3	200 / 5A	C50	0.3	0.6	0.6	1.2	2.4					
4	250 / 5A	C50	0.3	0.3	0.6	1.2	2.4					
5	300 / 5A	C50	0.3	0.3	0.6	1.2	2.4					
6	350 / 5A	C50	0.3	0.3	0.6	1.2	1.2					
7	400 / 5A	C100	0.3	0.3	0.3	0.6	0.6					
8	450 / 5A	C100	OR	0.3	OR	0.3	OR	0.3	OR	0.3	OR	0.3
9	500 / 5A	C100	0.3	0.3	0.3	0.3	0.3	0.3				
10	600 / 5A	C100	0.3	0.3	0.3	0.3	0.3	0.3				
11	750 / 5A	C100	0.3	0.3	0.3	0.3	0.3	0.3				
12	800 / 5A	C200	0.3	0.3	0.3	0.3	0.3	0.3				
13	1000 / 5A	C100	0.3	0.3	0.3	0.3	0.3	0.3				
14	1100 / 5A	C100	0.3	0.3	0.3	0.3	0.3	0.3				
15	1200 / 5A	C200	0.3	0.3	0.3	0.3	0.3	0.3				

#### Group 2

1-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1	B0.2	B0.5	B0.9	B1.8					
1	100 / 1A	C100	0.6	1.2	2.4	-	-					
2	150 / 1A	C200	0.6	0.6	1.2	2.4	-					
3	200 / 1A	C200	0.3	0.6	0.6	1.2	2.4					
4	250 / 1A	C200	0.3	0.3	0.6	1.2	2.4					
5	300 / 1A	C200	0.3	0.3	0.6	1.2	2.4					
6	350 / 1A	C400	0.3	0.3	0.6	1.2	1.2					
7	400 / 1A	C400	0.3	0.3	0.3	0.6	0.6					
8	450 / 1A	C400	OR	0.3	OR	0.3	OR	0.3	OR	0.3	OR	0.3
9	500 / 1A	C400	0.3	0.3	0.3	0.3	0.3	0.3				
10	600 / 1A	C400	0.3	0.3	0.3	0.3	0.3	0.3				
11	750 / 1A	C400	0.3	0.3	0.3	0.3	0.3	0.3				
12	800 / 1A	C400	0.3	0.3	0.3	0.3	0.3	0.3				
13	1000 / 1A	C400	0.3	0.3	0.3	0.3	0.3	0.3				
14	1100 / 1A	C400	0.3	0.3	0.3	0.3	0.3	0.3				
15	1200 / 1A	C400	0.3	0.3	0.3	0.3	0.3	0.3				

# Devices

## Current transformer

### UL-LSC-12 Selecting and ordering data

#### Group 3

2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)								
			B0.1	B0.2	B0.5	B0.9	B1.8				
1	100 / 5 / 5A	C10 / C10	2.4 / 2.4	4.8 / 4.8	4.8 / 4.8	-	-				
2	150 / 5 / 5A	C10 / C10	1.2 / 1.2	2.4 / 2.4	2.4 / 2.4	4.8 / 4.8	-				
3	200 / 5 / 5A	C20 / C20	1.2 / 1.2	1.2 / 1.2	2.4 / 2.4	2.4 / 2.4	4.8 / 4.8				
4	250 / 5 / 5A	C30 / C30	0.6 / 0.6	0.6 / 0.6	1.2 / 1.2	2.4 / 2.4	4.8 / 4.8				
5	300 / 5 / 5A	C30 / C30	0.6 / 0.6	0.6 / 0.6	1.2 / 1.2	2.4 / 2.4	4.8 / 4.8				
6	350 / 5 / 5A	C30 / C30	0.3 / 0.3	0.6 / 0.6	1.2 / 1.2	2.4 / 2.4	2.4 / 2.4				
7	400 / 5 / 5A	C50 / C50	0.3 / 0.3	0.3 / 0.3	0.6 / 0.6	1.2 / 1.2	1.2 / 1.2				
8	450 / 5 / 5A	C50 / C50	OR	OR	OR	OR	OR	OR	OR	OR	
9	500 / 5 / 5A	C50 / C50	0.3 / 0.3	0.3 / 0.3	0.6 / 0.6	0.6 / 0.6	0.6 / 0.6				
10	600 / 5 / 5A	C50 / C50	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3				
11	750 / 5 / 5A	C50 / C50	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3				
12	800 / 5 / 5A	C100 / C100	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3				
13	1000 / 5 / 5A	C50 / C50	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3				
14	1100 / 5 / 5A	C50 / C50	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3				
15	1200 / 5 / 5A	C50 / C50	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3	0.3 / 0.3				

#### Group 4

Relay & Metering 2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)								
			B0.1	B0.2	B0.5	B0.9	B1.8				
1	100 / 5 / 5A	C10	2.4	4.8	4.8	-	-				
2	150 / 5 / 5A	C20	1.2	2.4	2.4	4.8	-				
3	200 / 5 / 5A	C20	1.2	1.2	2.4	2.4	4.8				
4	250 / 5 / 5A	C30	0.6	0.6	1.2	2.4	4.8				
5	300 / 5 / 5A	C30	0.6	0.6	1.2	2.4	4.8				
6	350 / 5 / 5A	C30	0.3	0.6	1.2	2.4	2.4				
7	400 / 5 / 5A	C50	0.3	0.3	0.6	1.2	1.2				
8	450 / 5 / 5A	C50	AND	OR	OR	OR	OR	OR	OR	OR	
9	500 / 5 / 5A	C50	0.3	0.3	0.6	0.6	0.6				
10	600 / 5 / 5A	C50	0.3	0.3	0.3	0.3	0.3				
11	750 / 5 / 5A	C100	0.3	0.3	0.3	0.3	0.3				
12	800 / 5 / 5A	C100	0.3	0.3	0.3	0.3	0.3				
13	1000 / 5 / 5A	C100	0.3	0.3	0.3	0.3	0.3				
14	1100 / 5 / 5A	C100	0.3	0.3	0.3	0.3	0.3				
15	1200 / 5 / 5A	C100	0.3	0.3	0.3	0.3	0.3				

### UL-LSC-12 Selecting and ordering data

#### Group 5

2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1	B0.2	B0.5	B0.9	B1.8					
1	100 / 1 / 1A	C50 / C50		2.4 / 2.4		4.8 / 4.8		4.8 / 4.8		-		-
2	150 / 1 / 1A	C100 / C100		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4		4.8 / 4.8		-
3	200 / 1 / 1A	C100 / C100		1.2 / 1.2		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4		4.8 / 4.8
4	250 / 1 / 1A	C100 / C100		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		2.4 / 2.4		4.8 / 4.8
5	300 / 1 / 1A	C100 / C100		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		2.4 / 2.4		4.8 / 4.8
6	350 / 1 / 1A	C200 / C200		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4
7	400 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2		1.2 / 1.2
8	450 / 1 / 1A	C200 / C200	OR	0.3 / 0.3	OR	0.3 / 0.3	OR	0.6 / 0.6	OR	0.6 / 0.6	OR	0.6 / 0.6
9	500 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6
10	600 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
11	750 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
12	800 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
13	1000 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
14	1100 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
15	1200 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3

#### Group 6

Relay & Metering 2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1	B0.2	B0.5	B0.9	B1.8					
1	100 / 1 / 1A	C50		2.4		4.8		4.8		-		-
2	150 / 1 / 1A	C100		1.2		2.4		2.4		4.8		-
3	200 / 1 / 1A	C100		1.2		1.2		2.4		2.4		4.8
4	250 / 1 / 1A	C100		0.6		0.6		1.2		2.4		4.8
5	300 / 1 / 1A	C100		0.6		0.6		1.2		2.4		4.8
6	350 / 1 / 1A	C200		0.3		0.6		1.2		2.4		2.4
7	400 / 1 / 1A	C200		0.3		0.3		0.6		1.2		1.2
8	450 / 1 / 1A	C200	AND	0.3	OR	0.3	OR	0.6	OR	0.6	OR	0.6
9	500 / 1 / 1A	C200		0.3		0.3		0.6		0.6		0.6
10	600 / 1 / 1A	C200		0.3		0.3		0.3		0.3		0.6
11	750 / 1 / 1A	C200		0.3		0.3		0.3		0.3		0.3
12	800 / 1 / 1A	C200		0.3		0.3		0.3		0.3		0.3
13	1000 / 1 / 1A	C200		0.3		0.3		0.3		0.3		0.3
14	1100 / 1 / 1A	C200		0.3		0.3		0.3		0.3		0.3
15	1200 / 1 / 1A	C200		0.3		0.3		0.3		0.3		0.3




# Devices

## Current transformer

### CT for S5/15 UL AR

Model: UL-LSC-20 (C-5A2 or C-15A2)



Current rating Pri: sec Amperes	Continuous thermal current rating factor
50 : 5 ~ 2000 : 5	1.0

### UL-LSC-20 Selecting and ordering data

#### Group 1

1-Core

No	Current ratio	Relay class	Metering class (at 60Hz)							
			B0.1	B0.2	B0.5	B0.9	B1.8			
1	100 / 5A	C10	2.4	4.8	-	-	-			
2	150 / 5A	C20	0.6	1.2	2.4	-	-			
3	200 / 5A	C30	0.6	1.2	2.4	-	-			
4	250 / 5A	C30	0.6	0.6	1.2	2.4	-			
5	300 / 5A	C50	0.6	0.6	1.2	1.2	2.4			
6	350 / 5A	C50	0.3	0.6	0.6	1.2	2.4			
7	400 / 5A	C50	0.3	0.6	0.6	1.2	1.2			
8	450 / 5A	C50	0.3	0.3	0.3	0.6	1.2			
9	500 / 5A	C100	0.3	0.3	0.3	0.6	1.2			
10	600 / 5A	C100	0.3	0.3	0.3	0.6	1.2			
11	750 / 5A	C100	0.3	0.3	0.3	0.3	0.6			
12	800 / 5A	C100	0.3	0.3	0.3	0.3	0.6			
13	1000 / 5A	C200	0.3	0.3	0.3	0.3	0.3			
14	1100 / 5A	C200	0.3	0.3	0.3	0.3	0.3			
15	1200 / 5A	C200	0.3	0.3	0.3	0.3	0.3			
16	1500 / 5A	C200	0.3	0.3	0.3	0.3	0.3			
17	1600 / 5A	C200	0.3	0.3	0.3	0.3	0.3			
18	2000 / 5A	C200	0.3	0.3	0.3	0.3	0.3			

#### Group 2

1-Core

No	Current ratio	Relay class	Metering class (at 60Hz)							
			B0.1	B0.2	B0.5	B0.9	B1.8			
1	100 / 1A	C50	2.4	4.8	-	-	-			
2	150 / 1A	C100	0.6	1.2	2.4	-	-			
3	200 / 1A	C100	0.6	1.2	2.4	-	-			
4	250 / 1A	C200	0.6	0.6	1.2	2.4	-			
5	300 / 1A	C200	0.6	0.6	1.2	1.2	2.4			
6	350 / 1A	C200	0.3	0.6	0.6	1.2	2.4			
7	400 / 1A	C200	0.3	0.6	0.6	1.2	1.2			
8	450 / 1A	C200	0.3	0.3	0.3	0.6	1.2			
9	500 / 1A	C400	0.3	0.3	0.3	0.6	1.2			
10	600 / 1A	C400	0.3	0.3	0.3	0.6	1.2			
11	750 / 1A	C400	0.3	0.3	0.3	0.3	0.6			
12	800 / 1A	C400	0.3	0.3	0.3	0.3	0.6			
13	1000 / 1A	C400	0.3	0.3	0.3	0.3	0.3			
14	1100 / 1A	C400	0.3	0.3	0.3	0.3	0.3			
15	1200 / 1A	C400	0.3	0.3	0.3	0.3	0.3			
16	1500 / 1A	C800	0.3	0.3	0.3	0.3	0.3			
17	1600 / 1A	C800	0.3	0.3	0.3	0.3	0.3			
18	2000 / 1A	C800	0.3	0.3	0.3	0.3	0.3			

### UL-LSC-20 Selecting and ordering data

#### Group 3

2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)											
			B0.1		B0.2		B0.5		B0.9		B1.8			
1	100 / 5 / 5A	-	OR	-	OR	-	OR	-	OR	-	OR	-		
2	150 / 5 / 5A	-		-		-		-		-		-	-	-
3	200 / 5 / 5A	-		-		-		-		-		-	-	-
4	250 / 5 / 5A	C10 / C10		2.4 / 2.4		4.8 / 4.8		-		-		-	-	-
5	300 / 5 / 5A	C20 / C20		2.4 / 2.4		4.8 / 4.8		4.8 / 4.8		-		-	-	-
6	350 / 5 / 5A	C20 / C20		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4		4.8 / 4.8		-	-	-
7	400 / 5 / 5A	C30 / C30		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4		4.8 / 4.8		4.8 / 4.8	-	-
8	450 / 5 / 5A	C30 / C30		0.6 / 0.6		1.2 / 1.2		1.2 / 1.2		2.4 / 2.4		4.8 / 4.8	4.8 / 4.8	4.8 / 4.8
9	500 / 5 / 5A	C30 / C30		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		2.4 / 2.4	2.4 / 2.4	2.4 / 2.4
10	600 / 5 / 5A	C30 / C30		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		1.2 / 1.2	1.2 / 1.2	1.2 / 1.2
11	750 / 5 / 5A	C50 / C50		0.3 / 0.3		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6	0.6 / 0.6	0.6 / 0.6
12	800 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3	0.6 / 0.6	0.6 / 0.6
13	1000 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3	0.3 / 0.3	0.6 / 0.6
14	1100 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3	0.3 / 0.3	0.3 / 0.3
15	1200 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3	0.3 / 0.3	0.3 / 0.3
16	1500 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3	0.3 / 0.3	0.3 / 0.3
17	1600 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3	0.3 / 0.3	0.3 / 0.3
18	2000 / 5 / 5A	C100 / C100		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3	0.3 / 0.3	0.3 / 0.3

#### Group 4

Relay & Metering 2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)											
			B0.1		B0.2		B0.5		B0.9		B1.8			
1	100 / 5 / 5A	-	AND	-	OR	-	OR	-	OR	-	OR	-		
2	150 / 5 / 5A	-		-		-		-		-		-	-	-
3	200 / 5 / 5A	-		-		-		-		-		-	-	-
4	250 / 5 / 5A	C10		2.4		4.8		-		-		-	-	-
5	300 / 5 / 5A	C20		2.4		4.8		4.8		-		-	-	-
6	350 / 5 / 5A	C20		1.2		2.4		2.4		4.8		-	-	-
7	400 / 5 / 5A	C30		1.2		2.4		2.4		4.8		4.8	-	-
8	450 / 5 / 5A	C30		0.6		1.2		1.2		2.4		4.8	4.8	4.8
9	500 / 5 / 5A	C30		0.6		0.6		0.6		1.2		2.4	2.4	2.4
10	600 / 5 / 5A	C30		0.6		0.6		0.6		1.2		1.2	1.2	1.2
11	750 / 5 / 5A	C50		0.3		0.6		0.6		0.6		0.6	0.6	0.6
12	800 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.6	0.6	0.6
13	1000 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.3	0.3	0.6
14	1100 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.3	0.3	0.3
15	1200 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.3	0.3	0.3
16	1500 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.3	0.3	0.3
17	1600 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.3	0.3	0.3
18	2000 / 5 / 5A	C100		0.3		0.3		0.3		0.3		0.3	0.3	0.3

# Devices

## Current transformer

### UL-LSC-20 Selecting and ordering data

#### Group 5

2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)											
			B0.1		B0.2		B0.5		B0.9		B1.8			
1	100 / 1 / 1A	-	OR	-	OR	-	OR	-	OR	-	OR	-		
2	150 / 1 / 1A	-		-		-		-		-		-	-	-
3	200 / 1 / 1A	-		-		-		-		-		-	-	-
4	250 / 1 / 1A	C50 / C50		2.4 / 2.4		4.8 / 4.8		-		-		-	-	-
5	300 / 1 / 1A	C100 / C100		2.4 / 2.4		4.8 / 4.8		4.8 / 4.8		-		-	-	-
6	350 / 1 / 1A	C100 / C100		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4		4.8 / 4.8		-	-	-
7	400 / 1 / 1A	C100 / C100		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4		4.8 / 4.8		4.8 / 4.8	-	-
8	450 / 1 / 1A	C100 / C100		0.6 / 0.6		1.2 / 1.2		1.2 / 1.2		2.4 / 2.4		4.8 / 4.8	4.8 / 4.8	4.8 / 4.8
9	500 / 1 / 1A	C100 / C100		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		2.4 / 2.4	4.8 / 4.8	4.8 / 4.8
10	600 / 1 / 1A	C100 / C100		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		2.4 / 2.4	4.8 / 4.8	4.8 / 4.8
11	750 / 1 / 1A	C200 / C200		0.3 / 0.3		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		2.4 / 2.4	4.8 / 4.8	4.8 / 4.8
12	800 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2	2.4 / 2.4	4.8 / 4.8
13	1000 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2	2.4 / 2.4	4.8 / 4.8
14	1100 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2	2.4 / 2.4	4.8 / 4.8
15	1200 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2	2.4 / 2.4	4.8 / 4.8
16	1500 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2	2.4 / 2.4	4.8 / 4.8
17	1600 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2	2.4 / 2.4	4.8 / 4.8
18	2000 / 1 / 1A	C200 / C200		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		1.2 / 1.2	2.4 / 2.4	4.8 / 4.8


#### Group 6

Relay & Metering 2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)											
			B0.1		B0.2		B0.5		B0.9		B1.8			
1	100 / 1 / 1A	-	AND	-	OR	-	OR	-	OR	-	OR	-		
2	150 / 1 / 1A	-		-		-		-		-		-	-	-
3	200 / 1 / 1A	-		-		-		-		-		-	-	-
4	250 / 1 / 1A	C50		2.4		4.8		-		-		-	-	-
5	300 / 1 / 1A	C100		2.4		4.8		4.8		-		-	-	-
6	350 / 1 / 1A	C100		1.2		2.4		2.4		4.8		-	-	-
7	400 / 1 / 1A	C100		1.2		2.4		2.4		4.8		4.8	-	-
8	450 / 1 / 1A	C100		0.6		1.2		1.2		2.4		4.8	4.8	4.8
9	500 / 1 / 1A	C100		0.6		0.6		0.6		1.2		2.4	4.8	4.8
10	600 / 1 / 1A	C100		0.6		0.6		0.6		1.2		2.4	4.8	4.8
11	750 / 1 / 1A	C200		0.3		0.6		0.6		1.2		2.4	4.8	4.8
12	800 / 1 / 1A	C200		0.3		0.3		0.3		0.6		1.2	2.4	4.8
13	1000 / 1 / 1A	C200		0.3		0.3		0.3		0.6		1.2	2.4	4.8
14	1100 / 1 / 1A	C200		0.3		0.3		0.3		0.6		1.2	2.4	4.8
15	1200 / 1 / 1A	C200		0.3		0.3		0.3		0.6		1.2	2.4	4.8
16	1500 / 1 / 1A	C200		0.3		0.3		0.3		0.6		1.2	2.4	4.8
17	1600 / 1 / 1A	C200		0.3		0.3		0.3		0.6		1.2	2.4	4.8
18	2000 / 1 / 1A	C200		0.3		0.3		0.3		0.6		1.2	2.4	4.8

### CT for S5/15 UL NAR

Model: DCIB-L87 (C-5N1 or C-5N2 or C-15N1 or C-15N2)



Ratio	Continuous thermal current rating factor
50/5A ~ 2000/5A	1.0

### DCIB-L87 Selecting and ordering data

#### Group 1

1-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1	B0.2	B0.5	B0.9	B1.8					
1	75 / 5A	C5	2.4	4.8	-	-	-					
2	100 / 5A	C10	2.4	4.8	-	-	-					
3	150 / 5A	C20	0.6	1.2	2.4	-	-					
4	200 / 5A	C20	0.6	1.2	2.4	-	-					
5	250 / 5A	C30	0.6	0.6	1.2	2.4	-					
6	300 / 5A	C30	0.6	0.6	1.2	1.2	2.4					
7	350 / 5A	C30	0.3	0.6	0.6	1.2	2.4					
8	400 / 5A	C30	0.3	0.6	0.6	1.2	1.2					
9	450 / 5A	C30	0.3	0.3	0.3	0.6	1.2					
10	500 / 5A	C50	OR	0.3	OR	0.3	OR	0.6	OR	0.6	OR	1.2
11	600 / 5A	C50	0.3	0.3	0.3	0.6	1.2					
12	750 / 5A	C50	0.3	0.3	0.3	0.3	0.6					
13	800 / 5A	C50	0.3	0.3	0.3	0.3	0.6					
14	1000 / 5A	C100	0.3	0.3	0.3	0.3	0.3					
15	1100 / 5A	C100	0.3	0.3	0.3	0.3	0.3					
16	1200 / 5A	C100	0.3	0.3	0.3	0.3	0.3					
17	1500 / 5A	C100	0.3	0.3	0.3	0.3	0.3					
18	1600 / 5A	C100	0.3	0.3	0.3	0.3	0.3					
19	2000 / 5A	C200	0.3	0.3	0.3	0.3	0.3					

#### Group 2

1-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1	B0.2	B0.5	B0.9	B1.8					
1	50 / 1A	C5	4.8	-	-	-	-					
2	75 / 1A	C10	2.4	4.8	-	-	-					
3	100 / 1A	C10	2.4	4.8	-	-	-					
4	150 / 1A	C20	0.6	1.2	2.4	-	-					
5	200 / 1A	C20	0.6	1.2	2.4	-	-					
6	250 / 1A	C30	0.6	0.6	1.2	2.4	-					
7	300 / 1A	C30	0.6	0.6	1.2	1.2	2.4					
8	350 / 1A	C30	0.3	0.6	0.6	1.2	2.4					
9	400 / 1A	C50	0.3	0.6	0.6	1.2	1.2					
10	450 / 1A	C50	OR	0.3	OR	0.3	OR	0.6	OR	0.6	OR	1.2
11	500 / 1A	C50	0.3	0.3	0.3	0.6	1.2					
12	600 / 1A	C50	0.3	0.3	0.3	0.6	1.2					
13	750 / 1A	C50	0.3	0.3	0.3	0.3	0.6					
14	800 / 1A	C100	0.3	0.3	0.3	0.3	0.3					
15	1000 / 1A	C100	0.3	0.3	0.3	0.3	0.3					
16	1100 / 1A	C100	0.3	0.3	0.3	0.3	0.3					
17	1200 / 1A	C100	0.3	0.3	0.3	0.3	0.3					
18	1500 / 1A	C100	0.3	0.3	0.3	0.3	0.3					
19	1600 / 1A	C100	0.3	0.3	0.3	0.3	0.3					
20	2000 / 1A	C200	0.3	0.3	0.3	0.3	0.3					



# Devices

## Current transformer

### DCIB-L87 Selecting and ordering data

#### Group 3

2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1	B0.2	B0.5	B0.9	B1.8					
1	250 / 5 / 5A	C10 / C10	OR	2.4 / 2.4	OR	4.8 / 4.8	OR	-	OR	-	OR	-
2	300 / 5 / 5A	C10 / C10		2.4 / 2.4		4.8 / 4.8		4.8 / 4.8		-		-
3	350 / 5 / 5A	C20 / C20		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4		4.8 / 4.8		-
4	400 / 5 / 5A	C20 / C20		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4		4.8 / 4.8		4.8 / 4.8
5	450 / 5 / 5A	C20 / C20		0.6 / 0.6		1.2 / 1.2		1.2 / 1.2		2.4 / 2.4		2.4 / 2.4
6	500 / 5 / 5A	C20 / C20		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		1.2 / 1.2		2.4 / 2.4
7	600 / 5 / 5A	C20 / C20		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6		1.2 / 1.2		1.2 / 1.2
8	750 / 5 / 5A	C20 / C20		0.3 / 0.3		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6		0.6 / 0.6
9	800 / 5 / 5A	C30 / C30		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.6 / 0.6		0.6 / 0.6
10	1000 / 5 / 5A	C30 / C30		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
11	1100 / 5 / 5A	C30 / C30		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
12	1200 / 5 / 5A	C30 / C30		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
13	1500 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
14	1600 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3
15	2000 / 5 / 5A	C50 / C50		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3		0.3 / 0.3

#### Group 4

Relay & Metering 2-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1	B0.2	B0.5	B0.9	B1.8					
1	250 / 5 / 5A	C10	AND	2.4	OR	4.8	OR	-	OR	-	OR	-
2	300 / 5 / 5A	C10		2.4		4.8		4.8		-		-
3	350 / 5 / 5A	C20		1.2		2.4		2.4		4.8		-
4	400 / 5 / 5A	C20		1.2		2.4		2.4		4.8		4.8
5	450 / 5 / 5A	C20		0.6		1.2		1.2		2.4		2.4
6	500 / 5 / 5A	C20		0.6		0.6		1.2		1.2		2.4
7	600 / 5 / 5A	C20		0.6		0.6		0.6		1.2		1.2
8	750 / 5 / 5A	C20		0.3		0.6		0.6		0.6		0.6
9	800 / 5 / 5A	C30		0.3		0.3		0.3		0.6		0.6
10	1000 / 5 / 5A	C30		0.3		0.3		0.3		0.3		0.3
11	1100 / 5 / 5A	C30		0.3		0.3		0.3		0.3		0.3
12	1200 / 5 / 5A	C30		0.3		0.3		0.3		0.3		0.3
13	1500 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.3
14	1600 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.3
15	2000 / 5 / 5A	C50		0.3		0.3		0.3		0.3		0.3

# Devices

## Current transformer

UL/ANSI Medium Voltage  
Metal Clad Switchgear

### CT for S38 ANSI AR & NAR

Model: DCIB-L81 (C-38I1 or C-38I2)

<b>APPLICATION</b>		For relaying and metering	
<b>FREQUENCY</b>		60Hz	
<b>INSULATION CLASS</b>		600V, BIL 10kV full wave	
<b>THERMAL RATING</b>		1.0 at 30°C	
<b>OUTER ENCAPSULATION</b>		ABS CASE	
<b>Height</b>	11.46"	<b>Depth</b>	5.98"
<b>Width</b>	11.46"	<b>Weight</b>	10.5kg



### DCIB-L81 Selecting and ordering data

Group 1


1-Core

No	Current ratio	Relay class	Metering class (at 60Hz)									
			B0.1		B0.2		B0.5		B0.9		B1.8	
1	600 / 5A	C200	AND	0.3	OR	0.3	OR	0.3	OR	0.3	OR	0.3
2	1200 / 5A	C400		0.3		-		0.3		0.3		
3	2000 / 5A	C400		0.3		0.3		0.3		0.3		
4	3000 / 5A	C800		0.3		0.3		0.3		0.3		
5	4000 / 5A	C800		0.3		0.3		0.3		0.3		
6	5000 / 5A	C800		0.3		0.3		0.3		0.3		

# Devices

## Voltage transformer

### Ordering information

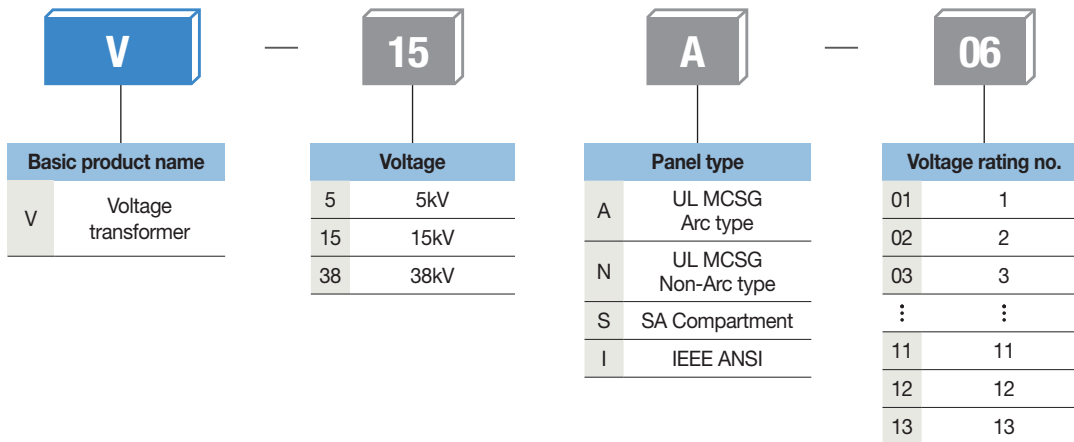

#### Ordering example 1)

- For 15kV Arc type MCSG
- Voltage rating:  $7200/\sqrt{3} : 120/\sqrt{3}V$ 
  - ▶ V-15A-06

#### Ordering example 2)

- For 15kV Non-Arc type MCSG
- Voltage rating:  $13200/\sqrt{3} : 120/\sqrt{3}V$ 
  - ▶ V-15N-09

#### Ordering example 3)

- For 38kV MCSG
- Voltage rating:  $27600/\sqrt{3} : 115/\sqrt{3}V$ 
  - ▶ V-38I-01

### VT for S5/15 UL AR

Model: UL-LSP-15N (V-5A or V-15A)

Ratio	Thermal rating	
	Ambient	
	30°C	55°C
20 : 1 ~ 125 : 1	1500VA	1000VA



### UL-LSP-15N Selecting and ordering data

No	Voltage rating	Ratio	Accuracy / Burden	Not	Voltage
1	2400/√3 : 120/√3V	20 : 1	0.3 Y & 1.2 Z	60Hz	15kV
2	3300/√3 : 110/√3V	30 : 1	0.3 Y & 1.2 Z	50Hz	15kV
3	4200/√3 : 120/√3V	35 : 1	0.3 Y & 1.2 Z	60Hz	15kV
4	4800/√3 : 120/√3V	40 : 1	0.3 Y & 1.2 Z	60Hz	15kV
5	6600/√3 : 110/√3V	60 : 1	0.3 Y & 1.2 Z	50Hz	15kV
6	7200/√3 : 120/√3V	60 : 1	0.3 Y & 1.2 Z	60Hz	15kV
7	8400/√3 : 120/√3V	70 : 1	0.3 Y & 1.2 Z	60Hz	15kV
8	11000/√3 : 110/√3V	100 : 1	0.3 Y & 1.2 Z	50Hz	15kV
9	12000/√3 : 120/√3V	100 : 1	0.3 Y & 1.2 Z	60Hz	15kV
10	13200/√3 : 120/√3V	110 : 1	0.3 Y & 1.2 Z	60Hz	15kV
11	13800/√3 : 120/√3V	115 : 1	0.3 Y & 1.2 Z	60Hz	15kV
12	14400/√3 : 120/√3V	120 : 1	0.3 Y & 1.2 Z	60Hz	15kV
13	15000/√3 : 120/√3V	125 : 1	0.3 Y & 1.2 Z	60Hz	15kV




# Devices

## Voltage transformer

### VT for S5/15 UL AR (SA Compartment)

Model: DPE-15NF (V-5S or V-15S)

Ratio	Thermal rating	
	Ambient	
	30°C	55°C
20 : 1 ~ 120 : 1	1500VA	1000VA

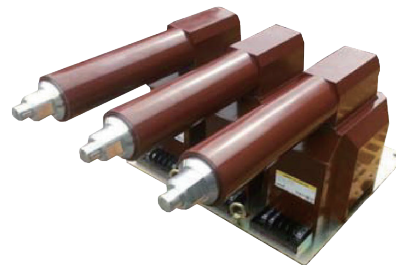

### DPE-15NF Selecting and ordering data

No	Voltage rating	Ratio	Accuracy / Burden	Not	Voltage
1	2400/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	20 : 1	0.3 Y & 1.2 Z	60Hz	15kV
2	4160/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	35 : 1	0.3 Y & 1.2 Z	60Hz	15kV
3	4200/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	35 : 1	0.3 Y & 1.2 Z	60Hz	15kV
4	4760/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	40 : 1	0.3 Y & 1.2 Z	60Hz	15kV
5	4800/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	40 : 1	0.3 Y & 1.2 Z	60Hz	15kV
6	7200/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	60 : 1	0.3 Y & 1.2 Z	60Hz	15kV
7	8400/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	70 : 1	0.3 Y & 1.2 Z	60Hz	15kV
8	12000/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	100 : 1	0.3 Y & 1.2 Z	60Hz	15kV
9	13200/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	110 : 1	0.3 Y & 1.2 Z	60Hz	15kV
10	13800/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	115 : 1	0.3 Y & 1.2 Z	60Hz	15kV
11	14400/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	120 : 1	0.3 Y & 1.2 Z	60Hz	15kV
12	15000/ $\sqrt{3}$ : 120/ $\sqrt{3}$ V	125 : 1	0.3 Y & 1.2 Z	60Hz	15kV

# Devices

## Voltage transformer

UL/ANSI Medium Voltage  
Metal Clad Switchgear

### VT for S5/15 UL NAR

Model: DPE-18NF (V-5N or V-15N)

Ratio	Thermal rating	
	Ambient	
	30°C	55°C
20 : 1 ~ 125 : 1	1500VA	1000VA



### DPE-18NF Selecting and ordering data

No	Voltage rating	Ratio	Accuracy / Burden	Not	Voltage
1	2400/√3 : 120/√3V	20 : 1	0.3 Y & 1.2 Z	60Hz	5.6kV
2	4160/√3 : 120/√3V	35 : 1	0.3 Y & 1.2 Z	50Hz	5.6kV
3	4200/√3 : 120/√3V	35 : 1	0.3 Y & 1.2 Z	60Hz	5.6kV
4	4760/√3 : 120/√3V	40 : 1	0.3 Y & 1.2 Z	60Hz	5.6kV
5	4800/√3 : 120/√3V	40 : 1	0.3 Y & 1.2 Z	50Hz	5.6kV
6	7200/√3 : 120/√3V	60 : 1	0.3 Y & 1.2 Z	60Hz	9.52kV
7	8400/√3 : 120/√3V	70 : 1	0.3 Y & 1.2 Z	60Hz	9.52kV
8	12000/√3 : 120/√3V	100 : 1	0.3 Y & 1.2 Z	50Hz	15.5kV
9	13200/√3 : 120/√3V	110 : 1	0.3 Y & 1.2 Z	60Hz	15.5kV
10	13800/√3 : 120/√3V	115 : 1	0.3 Y & 1.2 Z	60Hz	15.5kV
11	14400/√3 : 120/√3V	120 : 1	0.3 Y & 1.2 Z	60Hz	15.5kV
12	15000/√3 : 120/√3V	125 : 1	0.3 Y & 1.2 Z	60Hz	15.5kV

# Devices

## Voltage transformer

### VT for S38 ANSI AR & NAR

Model: DPE-36NF (V-38I)

<b>APPLICATION</b>	For relaying and metering
<b>FREQUENCY</b>	60Hz
<b>INSULATION CLASS</b>	IEEE: 36.5kV, BIL 200kV full wave IEC: 36kV, BIL 170kV full wave
<b>THERMAL RATING</b>	1000 VA at 30°C
<b>INSULATION</b>	Epoxy mold
<b>WEIGHT</b>	Approx. 55kg



### DPE-36NF Selecting and ordering data

No	Voltage rating	Ratio	Accuracy / Burden	Not	Voltage
1	27600/ $\sqrt{3}$ : 115/ $\sqrt{3}$ V	240 : 1	0.3 Y & 1.2 Z	60Hz	36.5KV
2	134500/ $\sqrt{3}$ : 115/ $\sqrt{3}$ V	300 : 1	0.3 Y & 1.2 Z	60Hz	36.5KV

# Devices

## Remote racking system (RRS)

UL/ANSI Medium Voltage  
Metal Clad Switchgear

### RRS for S5/15 UL NAR

Remote racking system provides a safer operating environment through the proven method of adding distance between the operator and the arc flash incident energy at the switchgear site. LS can supply CBS's Arc Safe RRS as an option.



Product	Product description	Lead Time
RRS-3-LS VCB VL - Drive Assembly Only	Remote racking system - Single tool RRS-3 (Racking motor only) for LS VCB VL.	10 - 16 Weeks

# Project references

## C PJT

Project description	Data center
Location	Chicago, Illinois
Project owner	D company
Delivery	2017
Supply scope	VCB, CB Compartment for MV SWGR

## A PJT

Project description	Data center
Location	Ashburn, Virginia
Project owner	D company
Delivery	2017
Supply scope	VCB, CB Compartment for MV SWGR

## LGE TN PJT

Project description	Home appliance manufacturing facility
Location	Clarksville, Tennessee
Project owner	LG Electronics
EPC contractor	DPR
Delivery	2018
Supply scope	MV SWGR, LV SWGR, Distribution board, Transformer, etc.

## LGE NJ new headquarters PJT

Project description	LG Electronic's new North American headquarters
Location	Englewood Cliffs, New Jersey
Project owner	LG Electronics
EPC contractor	Tuner
Delivery	2018
Supply scope	MV SWGR , LV SWGR, Distribution board, Transformer, etc.

## SKI GA PJT

Project description	Battery manufacturing plant
Location	Jackson County, Georgia
Project owner	SK Innovation
EPC contractor	SK E&C
Delivery	2020
Supply scope	MV SWGR, LV SWGR, MCC, Panel board, Transformer, Busduct, etc.



Complete package, more than you can possibly imagine!

Business concept	Phase 1 Full package Except LV wiring	Phase 2 Compartment + Core Part	Technical Agreement
<ul style="list-style-type: none"> <li>● : Supply</li> <li>◐ : Discussable</li> <li>- : N.A</li> </ul>			
Assembled switchgear (Elevation)	●	●	●
CB+PT compartment	-	-	-
Busbar compartment (Drawing)	-	●	●
Cable compartment (Drawing)	-	●	●
LV compartment (Drawing)	-	●	●
VCB	-	-	-
Ground & Test device	-	-	-
Technical consulting	●	●	●
Technical specification	●	●	●
Drawings	-	●	●
Assembly instruction	●	●	●
QC check list	●	●	●
Technical training (Basic/Per-dium)	●	●	●
Assembly training (Basic/Per-dium)	●	●	●
Inspection training (Basic/Per-dium)	●	●	●


# Partnership Business model

LS provides MCSG business solutions to the customers in a wide range of markets.

## Product range

4.76kV~38kV Medium Voltage Metal Clad Switchgears


## Phases of supplying scope

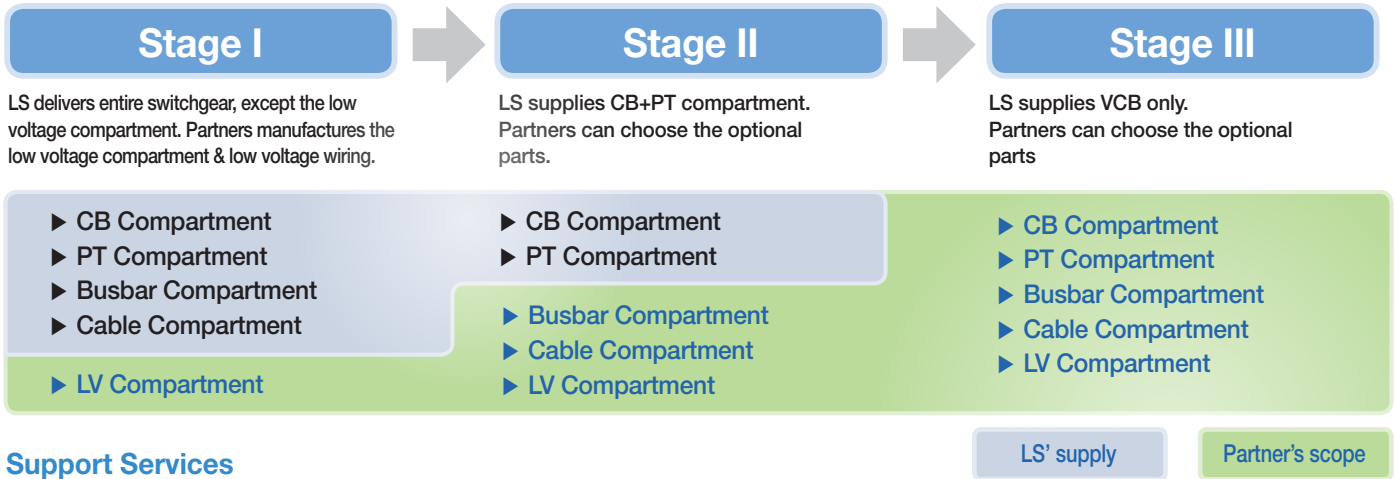


## Support Services

- Technical consulting
- Technical specification & drawings
- Assembly guide / manual
- QC process drawing
- Technical, assembly and inspection training


## Stage I

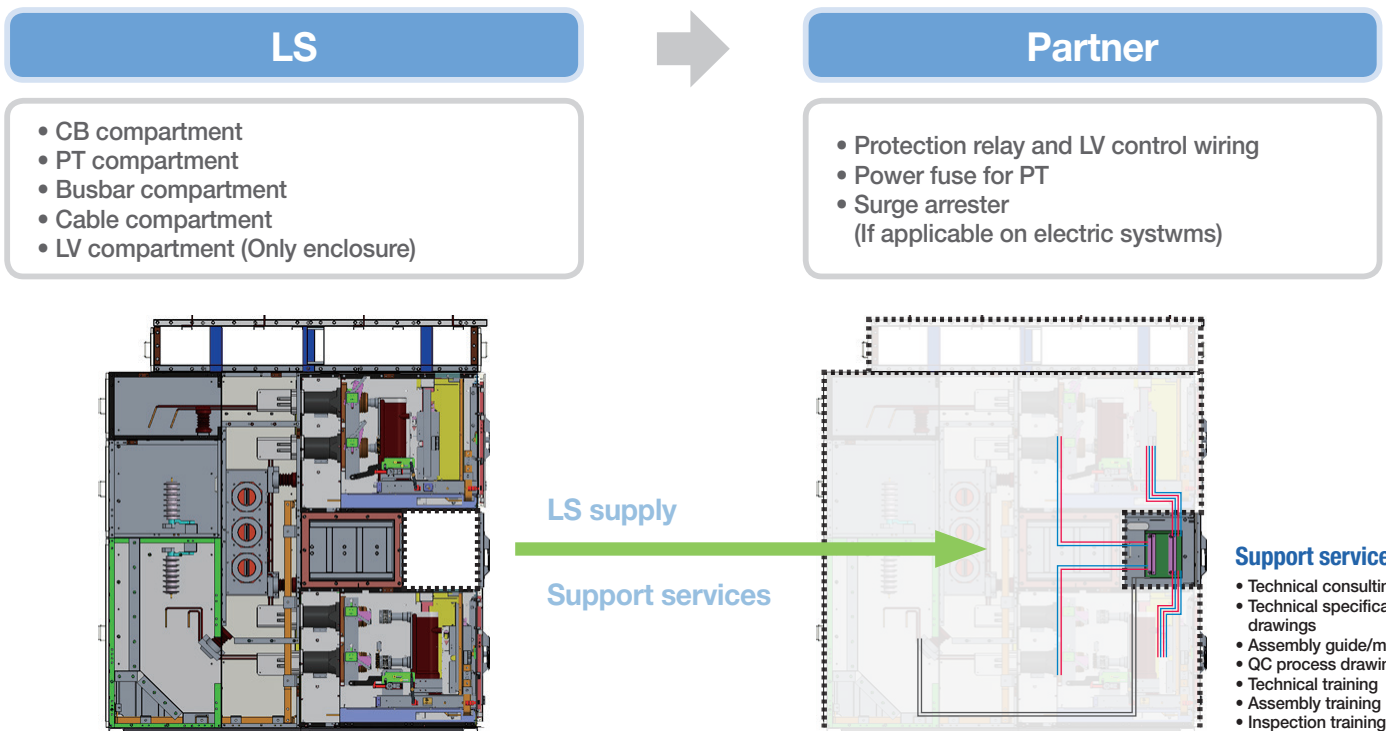

## Stage II

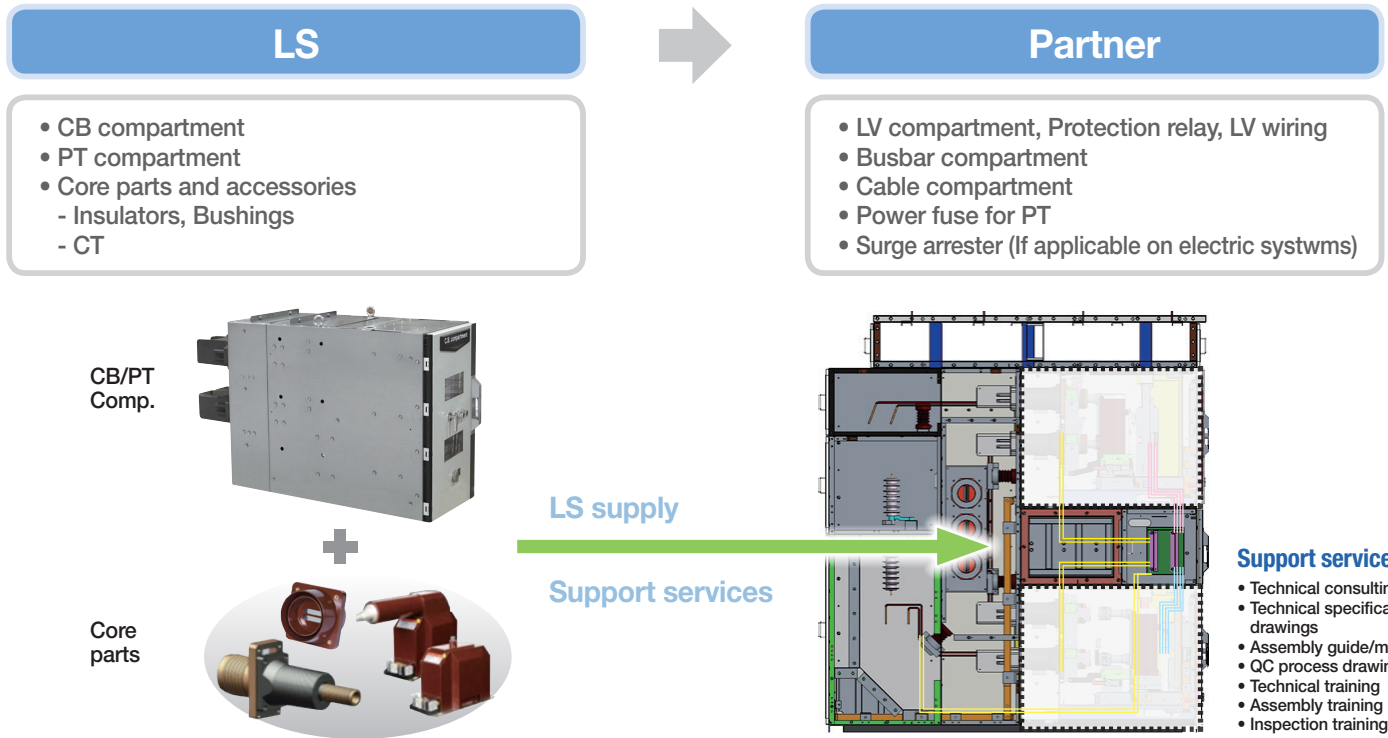

## Stage III

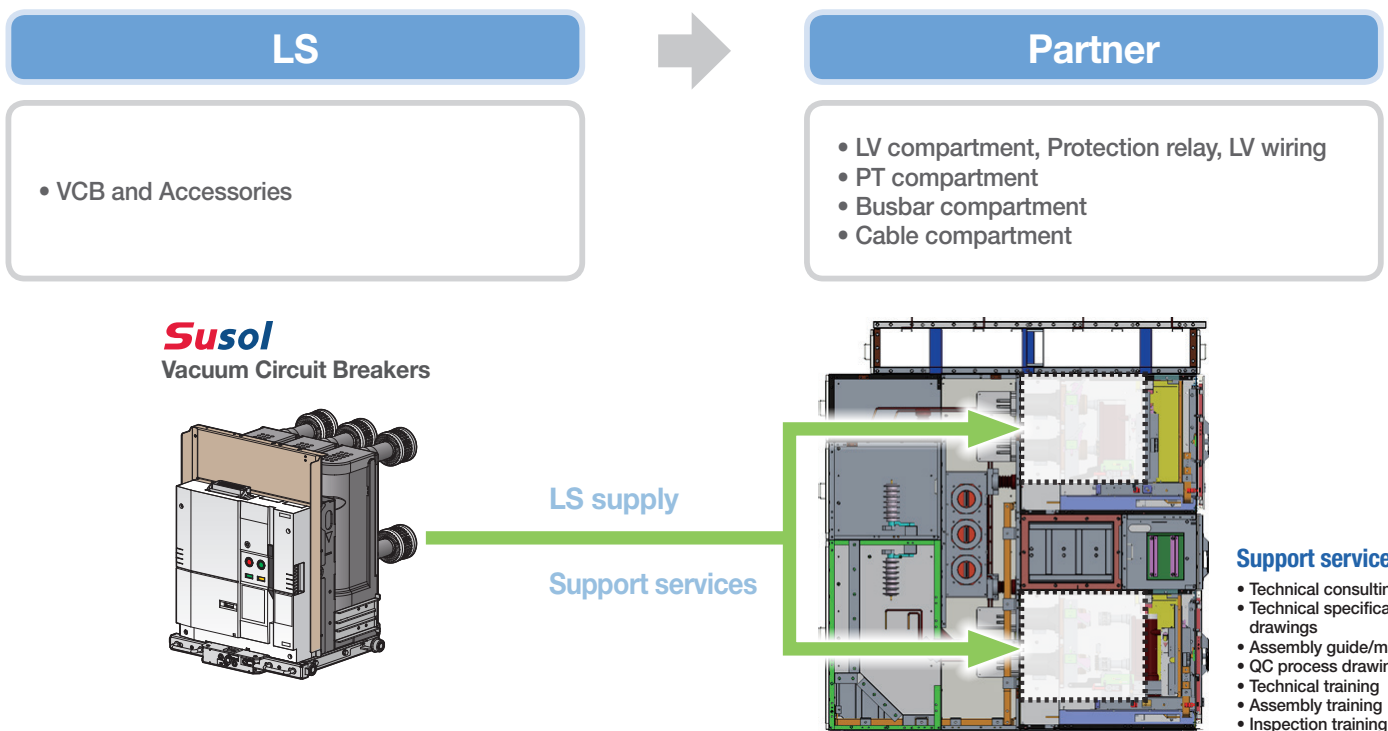

## Support services

Consulting services and technical assistance are provided according to the stage of business.


### Technical documentation

- Design drawings
- Assembly guide / manual
- Operation & maintenance

### Production training & support

- Technical training
- Assembly training
- Inspection training

### Test certificates

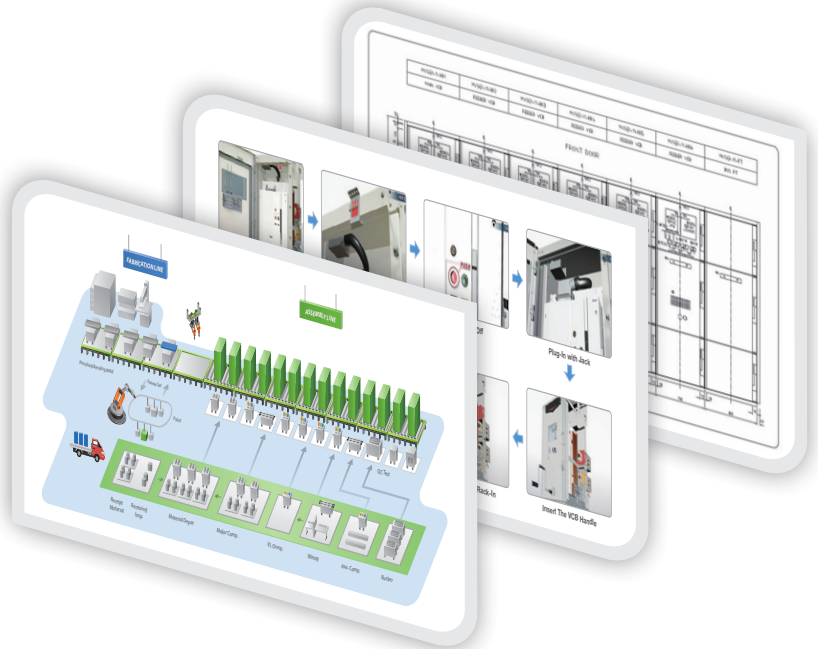

### Technical documentation

- Design drawings
- Assembly guide / manual
- Operation & maintenance

### Production training & support

- Technical training
- Assembly training
- Inspection training

### Test certificates

Design drawings	
Bill of material	
Assembly guide	
Operation manual	
Maintenance manual	

## Support services

Consulting services and technical assistance are provided according to the stage of business.


### Technical documentation

- Design drawings
- Assembly guide / manual
- Operation & maintenance

### Production training & support

- Technical training
- Assembly training
- Inspection training

### Test certificates

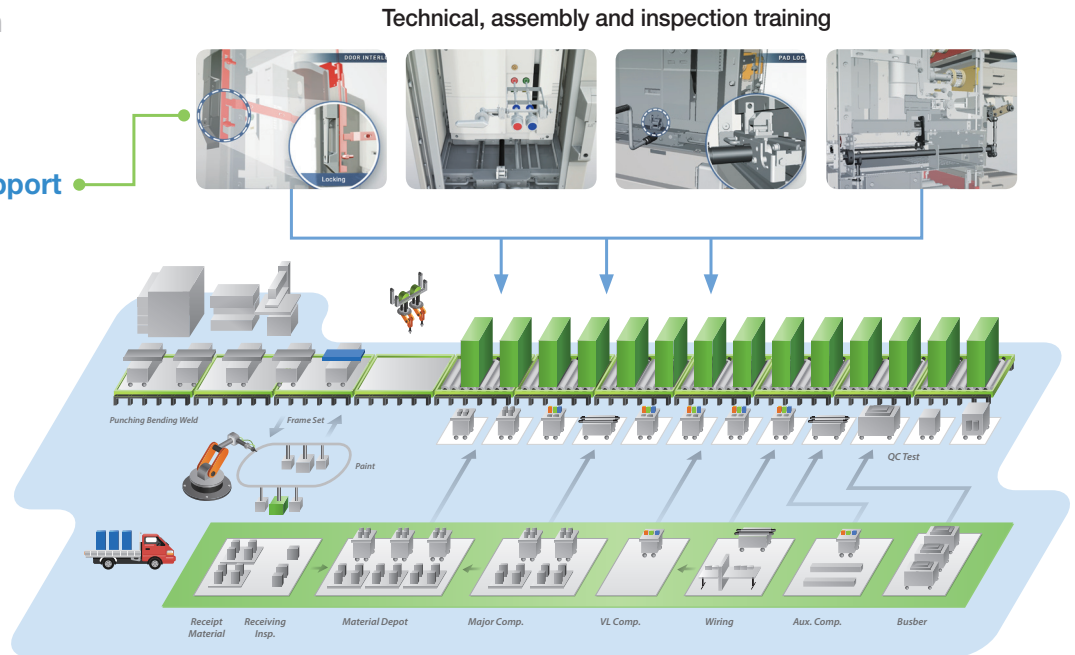



### Technical documentation

- Design drawings
- Assembly guide / manual
- Operation & maintenance

### Production training & support

- Technical training
- Assembly training
- Inspection training

### Test certificates

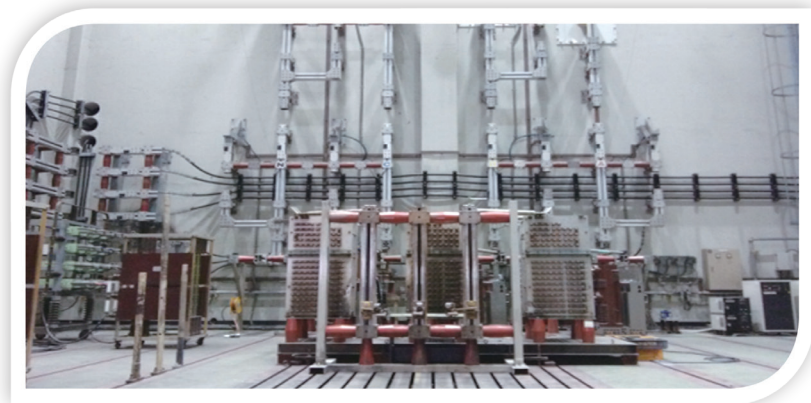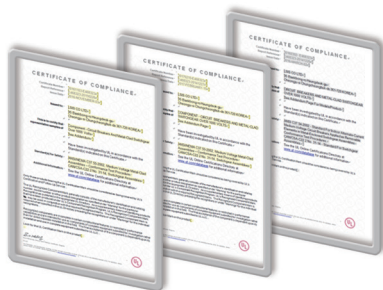

### MV test cell

#### ► Function

The site for testing medium-voltage circuit-breakers, switches, metal enclosed switchgear, transformers and power fuses

#### ► Testing capability: Short-circuit test

3 ph, 7.2 kV, 63 kA      3 ph, 25.8 kV, 25 kA      3 ph, 38 kV, 16 kA

#### ► Certificates





## Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance. Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



[www.LSElectricAmerica.com](http://www.LSElectricAmerica.com)

### ■ LS ELECTRIC America Inc. Chicago Head Office

980 Woodlands Parkway, Vernon Hills, IL 60061 USA  
Tel: 1-800-891-2941 E-Mail: sales.us@lselectricamerica.com

### ■ Headquarter

127 LS-ro (Hogye-dong) Dongan-gu, Anyang-si, Gyeonggi-Do, 14119, Korea

### ■ Seoul Office

LS Yongsan Tower, 92, Hangang-daero, Yongsan-gu, Seoul, 04386, Korea  
Tel: 82-2-2034-4916, 4684, 4429

### ■ Overseas Subsidiaries

#### • LS ELECTRIC Japan Co., Ltd. (Tokyo, Japan)

Tel: 81-3-6268-8241 E-Mail: japan@ls-electric.com

#### • LS ELECTRIC (Dalian) Co., Ltd. (Dalian, China)

Tel: 86-411-8730-5872 E-Mail: china.dalian@lselectric.com.cn

#### • LS ELECTRIC (Wuxi) Co., Ltd. (Wuxi, China)

Tel: 86-510-6851-6666 E-Mail: china.wuxi@lselectric.com.cn

#### • LS ELECTRIC Vietnam Co., Ltd. (Hanoi, Vietnam)

Tel: 84-222-2221-110 E-Mail: vietnam@ls-electric.com

#### • LS ELECTRIC Middle East FZE (Dubai, U.A.E.)

Tel: 971-4-886-5360 E-Mail: middleeast@ls-electric.com

#### • LS ELECTRIC Europe B.V. (Hoofddorp, Netherlands)

Tel: 31-20-654-1424 E-Mail: europartner@ls-electric.com

#### • LS ENERGY SOLUTIONS LLC (Charlotte, USA)

Tel: 1-704-587-4051 E-Mail: cmfeldman@ls-es.com

#### • LS ELECTRIC Türkiye Co., Ltd. (Istanbul, Türkiye)

Tel: 90-212-806-1252 E-Mail: turkiye@ls-electric.com

#### • LS ELECTRIC IBERIA S.L.U. (Madrid, Spain)

Tel: 34-910-28-02-74 E-Mail: iberia@ls-electric.com

### ■ Overseas Branches

#### • LS ELECTRIC Tokyo Office (Japan)

Tel: 81-3-6268-8241 E-Mail: tokyo@ls-electric.com

#### • LS ELECTRIC Beijing Office (China)

Tel: 86-10-5095-1631 E-Mail: china@lselectric.com.cn

#### • LS ELECTRIC Shanghai Office (China)

Tel: 86-21-5237-9977 E-Mail: china@lselectric.com.cn

#### • LS ELECTRIC Guangzhou Office (China)

Tel: 86-20-3818-2883 E-Mail: china@lselectric.com.cn

#### • LS ELECTRIC Chengdu Office (China)

Tel: 86-28-8670-3201 E-Mail: china@lselectric.com.cn

#### • LS ELECTRIC Qingdao Office (China)

Tel: 86-532-8501-2065 E-Mail: china@lselectric.com.cn

#### • LS ELECTRIC Nanjing Office (China)

Tel: 86-25-8467-0005 E-Mail: china@lselectric.com.cn

#### • LS ELECTRIC Bangkok Office (Thailand)

Tel: 66-90-950-9683 E-Mail: thailand@ls-electric.com

#### • LS ELECTRIC Jakarta Office (Indonesia)

Tel: 62-21-2933-7614 E-Mail: indonesia@ls-electric.com

#### • LS ELECTRIC Moscow Office (Russia)

Tel: 7-499-682-6130 E-Mail: info@lselectric-ru.com

#### • LS ELECTRIC America Western Office (Irvine, USA)

Tel: 1-949-333-3140 E-Mail: america@ls-electric.com

#### • LS ELECTRIC India Office (India)

Tel: 91-80-6142-9108 E-Mail: info\_india@ls-electric.com

#### • LS ELECTRIC Singapore Office (Singapore)

Tel: 65-6958-8162 E-Mail: singapore@ls-electric.com

#### • LS ELECTRIC Italy Office (Italy)

Tel: 39-030-8081-833 E-Mail: italia@ls-electric.com