

Component Selector for WYE-Delta Starter



Rated Voltage	Components needed per HP Rating	7.5	10	15	20	25	30	40	50	60	75	100	125	150	200	300	400
50/60Hz, 440-480VAC, 3-PH	MCs	MC-9a/b	MC-9a/b	MC-9a/b	MC-12a/b	MC-12a/b	MC-22b	MC-22b	MC-22b	MC-32a	MC-40a	MC-50a	MC-65a	MC-75a	MC-85a	MC-130a	MC-185a
	MCD	MC-9a/b	MC-9a/b	MC-18a/b	MC-18a/b	MC-22b	MC-50a	MC-50a	MC-50a	MC-75a	MC-75a	MC-130a	MC-185a	MC-185a	MC-185a	MC-265a	MC-500a
	MCm	MC-9a/b	MC-9a/b	MC-18a/b	MC-18a/b	MC-22b	MC-50a	MC-50a	MC-50a	MC-75a	MC-75a	MC-130a	MC-185a	MC-185a	MC-185a	MC-265a	MC-500a
	TOR/OLR	MT-12/32	MT-12/32	MT-32	MT-32	MT-32	MT-63	MT-63	MT-63	MT-95	MT-95	MT-150	MT-225	MT-225	MT-225	MT-400	MT-800
	Motor Amps		11	14	21	27	34	40	52	65	77	96	124	156	180	240	361


On Delay Timer available up to MC-150a

Model	Rated Voltage
UT-1N	AC/DC 24~48V
UT-2N	AC 110~220V

Legend
MCs = Starting Contactor (Y Connection)
MCD = Driving Contactor (Delta Connection)
MCm = Power Contactor (Main)
TOR/OLR = Thermal overload relay

Main and Delta=58% of AC3 current rating

Y Connection=33% of AC3 rating

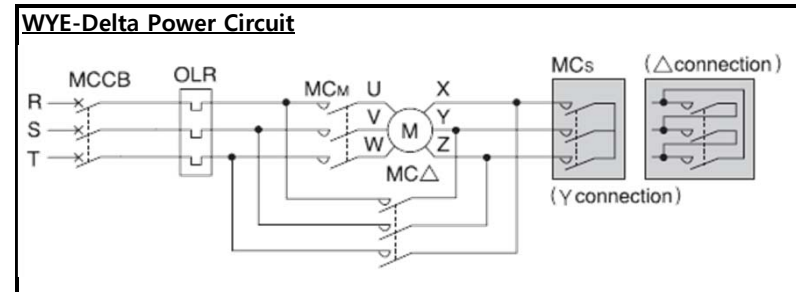

Note: Schematic does not include delay timer or control circuit portion.